

# SUBMITTAL DATA - INDOOR UNIT

VSEC018S4-4P

## **Ductless Floor Standing**

Job:	Engineer:
Location:	Architect:
Schedule No.:	Location:
System Designation:	Date:
•	For: Reference Approval Review Construction
Floor Standing Indoor Unit (Expose	d)

#### **FEATURES**

- Easy Maintenance
- Advanced Commissioning and Service
- Refrigerant R-410A
- · Five Capacity Sizes from 7,6000 to 24,000 Btu/h

### WARRANTY

• 10-year limited warranty.\*See warranty for details.

SPECIFICATIONS				
PERFORMANCE				
Cooling Capacity <sup>1</sup> (Btu/h)		18,000		
Heating Capacity <sup>1</sup> (Btu/h)		20,000		
Airflow (CFM)	Low/Medium/High	390/495/550		
External Static Pressure (in. w.	-			
Sound (dBA)	Low/Medium/High	32/36/40		
ELECTRICAL DATA				
Power Supply (Volts/Hertz/Phase)		208-230/60/1		
Cooling Power Input (W)		110		
Cooling Rated Current (A)		0.53		
Heating Power Input (W)		110		
Heating Rated Current (A)		0.53		
Fan Motor U put (W)		F€Á¢ÁF		
DIMENSIONS				
Unit Dimensions (in)	Width	57.05		
	Height	23.62		
	Depth	8.66		
Liquid Pipe Connection (in) (I.D.	D.)	1/4		
Gas Pipe Connection (in) (I.D.)		1/2		
Net Weight (lb)		69.4		
Shipping Weight (lb)		80.5		

OPTIONAL ACCESSORIES	
VSTAT02P-1 Touch Screen Wired Controller	37P79
VSTAT04P-1 Individual Wired Controller	37Y74
VSTAT01P-1 Wireless Remote Controller	37Y73



## **NOTES**

- 1. Nominal capacity are based on (Refrigerant Piping: 25ft, Level Differences: 0ft);
- .Cooling : Indoor temperature : 80°F DB, 67°F WB / Outdoor temperature : 95°F DB, 75°F WB
- .Heating : Indoor temperature : 70°F DB, 60°F WB / Outdoor temperature : 47°F DB, 43°F WB
- 2. Sound pressure was acquired in a dead room. Thus actual noise level may be different depending on the installation conditions.
- 3. Specifications are subject to change without prior notice for product improvement.







## SUBMITTAL DATA - INDOOR UNIT

**VSEC018S4-4P** 

**Ductless Floor Standing** 

DIMENSIONAL DRAWINGS - MM (IN.)

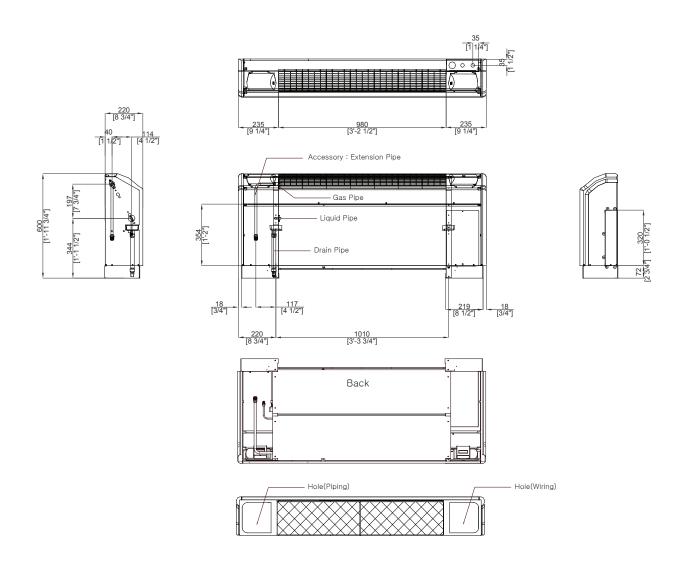

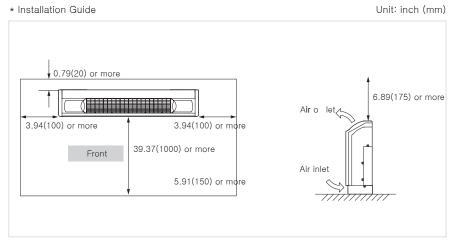

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.

Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

496290 (202412)

©2024 Lennox Industries Inc.