

Job: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Location: _____
 Date: _____
 For: Reference Approval Review Construction

Floor Standing Indoor Unit (Cased)

FEATURES

- Pre Heat Function
- Auto Addressing
- Auto Restart
- Electronic Expansion Valve
- High-Efficiency DC Motor
- Receiver/Display Panel
- Air Filter
- Flare Connections
- Refrigerant R-410A
- Six Capacity Sizes from 7,500 to 24,000 Btu/h

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)	15,000
Heating Capacity ¹ (Btu/h)	17,000
Airflow (CFM)	Low/Medium/High 311/358/408
External Static Pressure (in. w.g.)	0
Sound (dBA)	Low/Medium/High 34.4/38.1/41

ELECTRICAL DATA

Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA) (A)	0.54
Maximum Overcurrent Protection (MOP) (A)	15
Cooling Power Input (W)	44
Cooling Rated Current (A)	0.4
Heating Power Input (W)	46
Heating Rated Current (A)	0.4
Indoor Fan Motor Input (W)	30

DIMENSIONS

Unit Dimensions (in)	Width	48-7/8
	Height	19-1/2
	Depth	7-7/8
Liquid Pipe Connection (in) (I.D.)		1/4
Gas Pipe Connection (in) (I.D.)		1/2
Drain Connection (in) (O.D.)		3/4
Net Weight (lb)		54
Shipping Weight (lb)		73



OPTIONAL ACCESSORIES

<input type="checkbox"/> Wired Controller	V0STAT55P-3
<input type="checkbox"/> Support Feet	V8VSA001-3P
<input type="checkbox"/> Hotel Keycard Interface	V0CTRL88P-1

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB
 Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FDB
 Outdoor.

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.




DIMENSIONAL DRAWINGS - INCHES (MM)

VSCA015H4




TOP VIEW

SUPPLY
AIR OPENING



LEFT SIDE VIEW

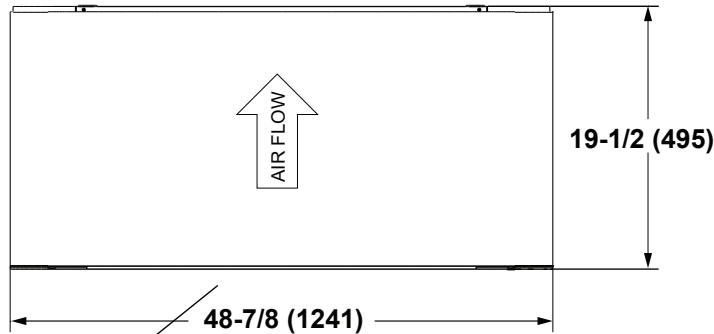

FRONT VIEW


RETURN
AIR OPENING
(Bottom)

19-1/2 (495)

48-7/8 (1241)



AIR FLOW

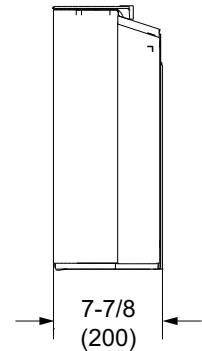

RIGHT SIDE VIEW


7-7/8
(200)

NOTE - Optional Feet (not shown) add 3-1/2 in. (89 mm) to the overall height



BOTTOM VIEW

RETURN
AIR OPENING

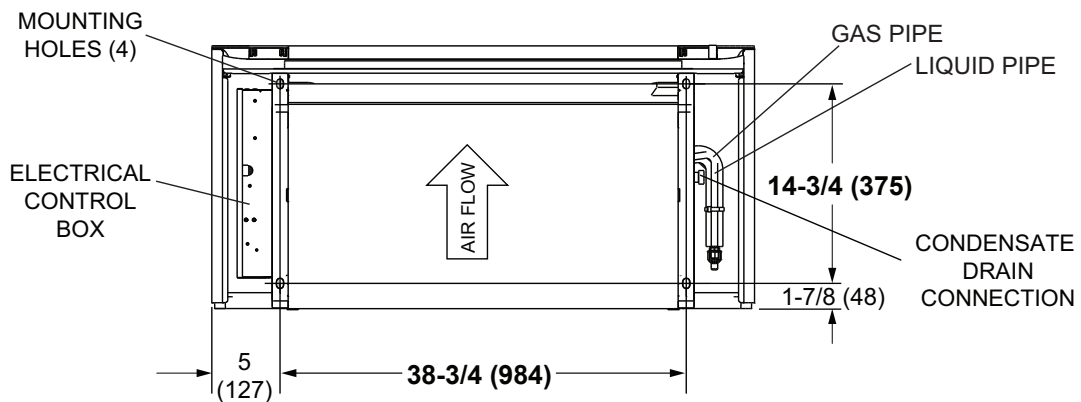

BACK VIEW

MOUNTING
HOLES (4)

ELECTRICAL
CONTROL
BOX

GAS PIPE

LIQUID PIPE

14-3/4 (375)

CONDENSATE
DRAIN
CONNECTION

1-7/8 (48)

5
(127)

38-3/4 (984)