



FLUSH / CONCENTRIC DIFFUSER ASSEMBLY TO SUIT






MODEL : FD11 - 135S

NOTE:

- DIFFUSER HEAD TO BE SUPPORTED INDEPENDENTLY FROM BUILDING STRUCTURE

FEATURES:

- 24GA (G90) GALVANIZED STEEL CONSTRUCTION
- INTERIOR CABINET INSULATED WITH 1" THICK, 1-1/2 lbs/cu ft UL LISTED DUCT LINER
- INTERIOR TRANSITION INSULATED WITH 1/2" THICK, 2 lbs/cu ft UL LISTED DUCT LINER
- COMBINATION SUPPLY/RETURN DIFFUSER WITH FIXED BLADES AND GRID CORE RETURN
- SUPPLY AND RETURN AIR DUCT COLLARS
- DIFFUSER FACE WHITE POWDER COAT FINISH

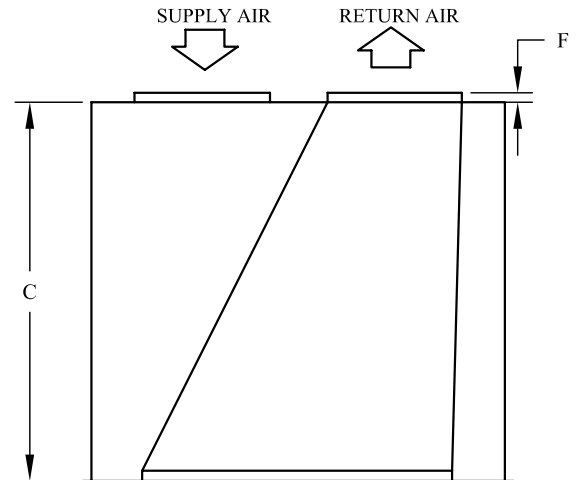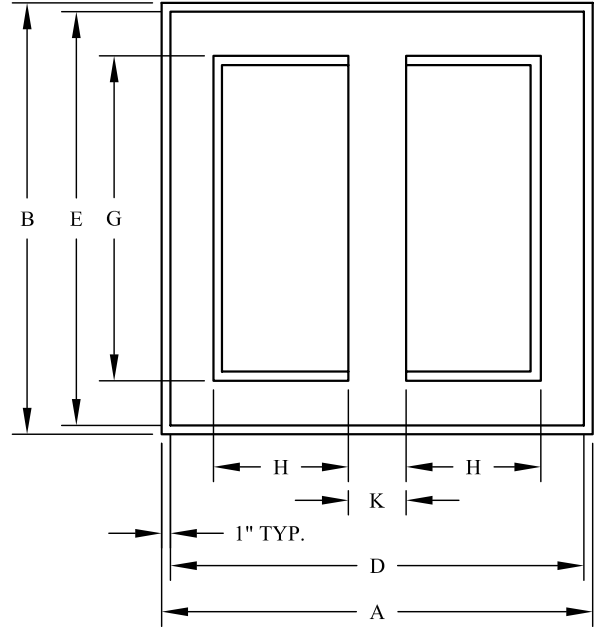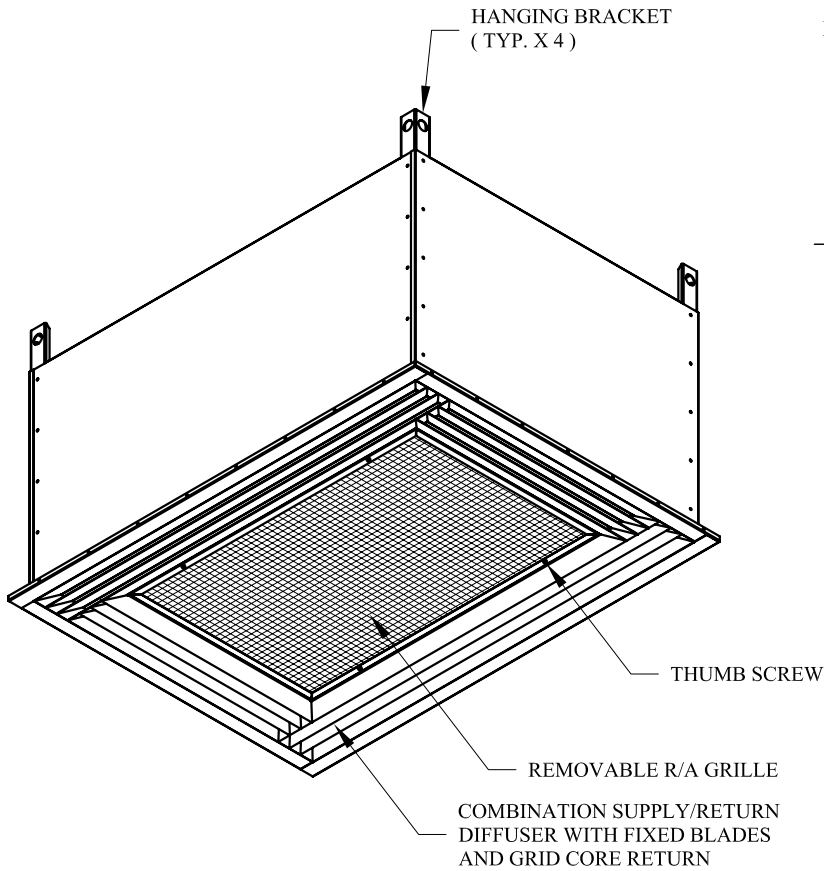

CAT #	CFM RANGE	THROW (RANGE FT)	DIMENSIONAL DATA									SHPG WEIGHT
			A	B	C	D	E	F	G	H	K	
13K57	4000-5000	25-38	47-5/8"	35-5/8"	23-1/4"	45"	33"	2"	28"	18"	4-1/2"	135 LBS

LFD135

AUG. 17 / 16