

# VSCC/VSEC


Floor Standing Indoor Units (Cased/Exposed) | R-410A | 60Hz

5,000 to 24,000 Btuh

## COMMERCIAL PRODUCT SPECIFICATIONS (EHB)



### MODEL NUMBER IDENTIFICATION

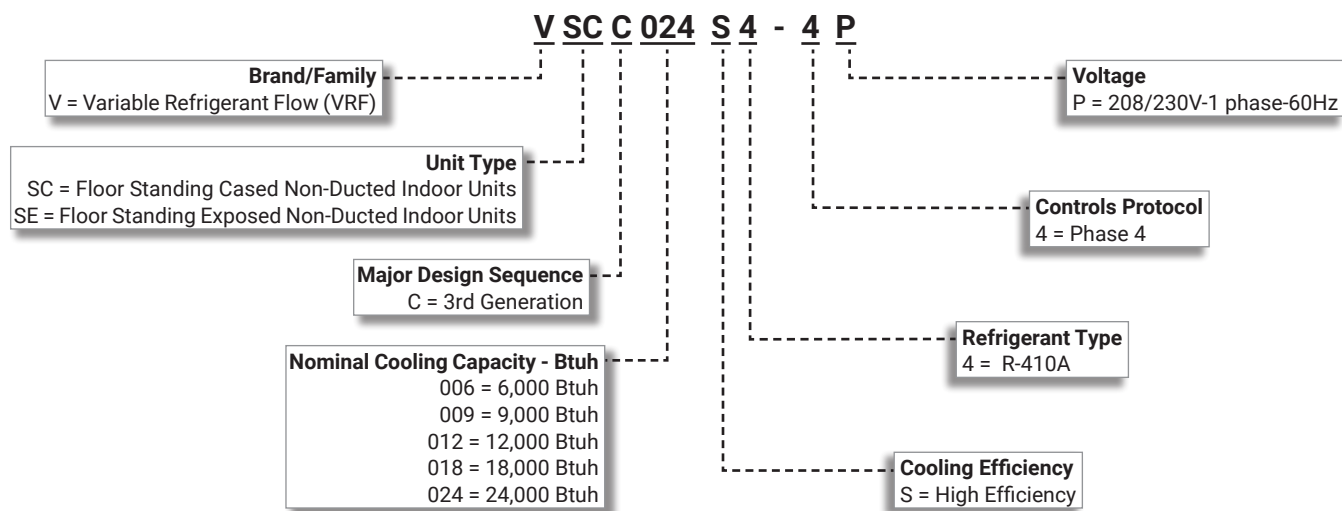

## CONTENTS

Capacity Table . . . . .	6
Dimensions . . . . .	12
Electrical Wiring . . . . .	16
Model Number Identification. . . . .	1
Sound Pressure Levels . . . . .	17
Specifications . . . . .	3
Temperature And Air Flow Distribution . . . . .	20

# Specification

## Floor Standing Cased/Exposed

Type			Cased	Exposed	Cased	Exposed	
Model Name			VSCC006S4-4P	VSEC006S4-4P	VSCC009S4-4P	VSEC009S4-4P	
Power Supply		Ø, #, V, Hz	1,2,208-230,60	1,2,208-230,60	1,2,208-230,60	1,2,208-230,60	
Mode			-	HP/HR	HP/HR	HP/HR	
Performance	Ton		0.50	0.50	0.79	0.79	
	Capacity (Nominal)	Cooling	kW	1.76	1.76	2.78	2.78
			Btu/h	6,000	6,000	9,500	9,500
		Heating	US RT	0.50	0.50	0.79	0.79
			kW	1.96	1.96	3.08	3.08
	US RT	0.56	0.56	0.87	0.87		
Power	Power Input (Nominal)	Cooling	W	35.00	35.00	40.00	40.00
		Heating	W	35.00	35.00	40.00	40.00
	Current Input (Nominal)	Cooling	A	0.20	0.20	0.22	0.22
		Heating	A	0.20	0.20	0.22	0.22
Fan	Motor	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
		Output x n	W	10 x 1	10 x 1	10 x 1	10 x 1
	Air Flow	H/M/L (UL)	CFM	175.00 / 140.00 / 105.00	175.00 / 140.00 / 105.00	250.00 / 195.00 / 160.00	250.00 / 195.00 / 160.00
	External Pressure	Min / Std / Max	Pa	-	-	-	-
In Wg			-	-	-	-	
Piping Connections	Liquid Pipe		Ø, mm	6.35	6.35	6.35	6.35
			Ø, inch	1/4"	1/4"	1/4"	1/4"
	Gas Pipe		Ø, mm	12.70	12.70	12.70	12.70
			Ø, inch	1/2"	1/2"	1/2"	1/2"
Drain Pipe	Ø, mm	ID18 HOSE	ID18 HOSE	ID18 HOSE	ID18 HOSE		
Field Wiring	Power Source Wire		mm <sup>2</sup>	2.5	2.5	2.5	2.5
	Transmission Cable		mm <sup>2</sup>	0.75 - 1.50	0.75 - 1.50	0.75 - 1.50	0.75 - 1.50
Refrigerant	Type		-	R410A	R410A	R410A	R410A
	Control Method		-	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED
Sound	Pressure	High / Mid / Low	dB(A)	23 / 22 / 20	23 / 22 / 20	26 / 24 / 21	26 / 24 / 21
	Power	Cooling		-	-	-	-
Dimensions	Net Weight		kg	23.00	25.99	23.00	25.99
			lbs	50.70	57.30	50.70	57.30
	Shipping Weight		kg	26.99	29.48	26.99	29.48
			lbs	59.50	65.00	59.50	65.00
	Net Dimensions (WxHxD)		mm	945 x 600 x 220	1,168 x 600 x 220	944 x 600 x 220	1,168 x 600 x 220
			inch	37.20 x 23.62 x 8.66	45.98 x 23.62 x 8.66	37.17 x 23.62 x 8.66	45.98 x 23.62 x 8.66
	Shipping Dimensions (WxHxD)		mm	1,035 x 690 x 310	1,255 x 690 x 310	1,035 x 690 x 310	1,255 x 690 x 310
			inch	40.75 x 27.17 x 12.20	49.41 x 27.17 x 12.20	40.75 x 27.17 x 12.20	49.41 x 27.17 x 12.20
Panel Size	Panel Model		-	-	-	-	-
	Panel Net Weight		kg	-	-	-	-
			lbs	-	-	-	-
	Shipping Weight		kg	-	-	-	-
			lbs	-	-	-	-
	Net Dimensions (WxHxD)		mm	-	-	-	-
			inch	-	-	-	-
	Shipping Dimensions (WxHxD)		mm	-	-	-	-
inch			-	-	-	-	
Additional Accessories	Drain pump	Drain pump	-	-	-	-	
		Max. lifting Height / Displacement	mm / liter / h	-	-	-	-
	Air Filter		-	Long Life Filter	Long Life Filter	Long Life Filter	Long Life Filter

- Nominal capacity are based on (Refrigerant Piping : 25ft , Level Differences : 0ft);

.Cooling : Indoor temperature : 80°F DB, 67°F WB / Outdoor temperature : 95°F DB, 75°F WB

.Heating : Indoor temperature : 70°F DB, 60°F WB / Outdoor temperature : 47°F DB, 43°F WB

- Sound pressure was acquired in a dead room. Thus actual noise level may be different depending on the installation conditions.

- Specifications are subject to change without prior notice for product improvement.

# Specification

## Floor Standing Cased/Exposed

Type			Cased	Exposed	Cased	Exposed	
Model Name			VSCC012S4-4P	VSEC012S4-4P	VSCC018S4-4P	VSEC018S4-4P	
Power Supply		Ø, #, V, Hz	1,2,208-230,60	1,2,208-230,60	1,2,208-230,60	1,2,208-230,60	
Mode		-	HP/HR	HP/HR	HP/HR	HP/HR	
Performance	Ton		1.00	1.00	1.50	1.50	
	Capacity (Nominal)	Cooling	kW	3.52	3.52	5.28	5.28
			Btu/h	12,000	12,000	18,000	18,000
			US RT	1.00	1.00	1.50	1.50
		Heating	kW	3.96	3.96	5.86	5.86
			Btu/h	13,500	13,500	20,000	20,000
US RT			1.13	1.13	1.67	1.67	
Power	Power Input (Nominal)	Cooling	W	50.00	50.00	110.00	110.00
		Heating		50.00	50.00	110.00	110.00
	Current Input (Nominal)	Cooling	A	0.24	0.24	0.53	0.53
		Heating		0.24	0.24	0.53	0.53
Fan	Motor	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
		Output x n	W	10 x 1	10 x 1	50 x 1	50 x 1
	Air Flow	H/M/L (UL)	CFM	350.00 / 300.00 / 210.00	350.00 / 300.00 / 210.00	550.00 / 495.00 / 390.00	550.00 / 495.00 / 390.00
	External Pressure	Min / Std / Max	Pa	-	-	-	-
In Wg			-	-	-	-	
Piping Connections	Liquid Pipe	Ø, mm	6.35	6.35	6.35	6.35	
		Ø, inch	1/4"	1/4"	1/4"	1/4"	
	Gas Pipe	Ø, mm	12.70	12.70	12.70	12.70	
		Ø, inch	1/2"	1/2"	1/2"	1/2"	
Drain Pipe	Ø, mm	ID18 HOSE	ID18 HOSE	ID18 HOSE	ID18 HOSE		
Field Wiring	Power Source Wire	mm <sup>2</sup>	2.5	2.5	2.5	2.5	
	Transmission Cable	mm <sup>2</sup>	0.75 - 1.50	0.75 - 1.50	0.75 - 1.50	0.75 - 1.50	
Refrigerant	Type	-	R410A	R410A	R410A	R410A	
	Control Method	-	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED	
Sound	Pressure	High / Mid / Low	dB(A)	37 / 32 / 27	37 / 32 / 27	40 / 36 / 32	40 / 36 / 32
	Power	Cooling		-	-	-	-
Dimensions	Net Weight	kg	23.00	25.99	28.49	31.48	
		lbs	50.70	57.30	62.80	69.40	
	Shipping Weight	kg	26.99	29.48	33.48	36.51	
		lbs	59.50	65.00	73.80	80.50	
	Net Dimensions (WxHxD)	mm	944 x 600 x 220	1,168 x 600 x 220	1,225 x 600 x 220	1,449 x 600 x 220	
		inch	37.17 x 23.62 x 8.66	45.98 x 23.62 x 8.66	48.23 x 23.62 x 8.66	57.05 x 23.62 x 8.66	
	Shipping Dimensions (WxHxD)	mm	1,035 x 690 x 310	1,255 x 690 x 310	1,335 x 690 x 310	1,534 x 690 x 310	
		inch	40.75 x 27.17 x 12.20	49.41 x 27.17 x 12.20	52.56 x 27.17 x 12.20	60.39 x 27.17 x 12.20	
Panel Size	Panel Model	-	-	-	-	-	
	Panel Net Weight	kg	-	-	-	-	
		lbs	-	-	-	-	
	Shipping Weight	kg	-	-	-	-	
		lbs	-	-	-	-	
	Net Dimensions (WxHxD)	mm	-	-	-	-	
		inch	-	-	-	-	
	Shipping Dimensions (WxHxD)	mm	-	-	-	-	
inch		-	-	-	-		
Additional Accessories	Drain pump	Drain pump	-	-	-	-	
		Max. lifting Height / Displacement	mm / liter / h	-	-	-	-
	Air Filter	-	Long Life Filter	Long Life Filter	Long Life Filter	Long Life Filter	

- Nominal capacity are based on (Refrigerant Piping : 25ft , Level Differences : 0ft);

.Cooling : Indoor temperature : 80°F DB, 67°F WB / Outdoor temperature : 95°F DB, 75°F WB

.Heating : Indoor temperature : 70°F DB, 60°F WB / Outdoor temperature : 47°F DB, 43°F WB

- Sound pressure was acquired in a dead room. Thus actual noise level may be different depending on the installation conditions.

- Specifications are subject to change without prior notice for product improvement.

# Specification

## Floor Standing Cased/Exposed

Type			Cased	Exposed	
Model Name			VSCC024S4-4P	VSEC024S4-4P	
Power Supply		Ø, #, V, Hz	1,2,208-230,60	1,2,208-230,60	
Mode		-	HP/HR	HP/HR	
Performance	Ton		2.00	2.00	
	Capacity (Nominal)	Cooling	kW	7.03	7.03
			Btu/h	24,000	24,000
		Heating	US RT	2.00	2.00
			kW	7.91	7.91
			US RT	2.25	2.25
Power	Power Input (Nominal)	Cooling	W	110.00	110.00
		Heating	W	110.00	110.00
	Current Input (Nominal)	Cooling	A	0.53	0.53
		Heating	A	0.53	0.53
Fan	Motor	Type	-	Sirocco Fan	Sirocco Fan
		Output x n	W	50 x 1	50 x 1
	Air Flow	H/M/L (UL)	CFM	550.00 / 495.00 / 390.00	550.00 / 495.00 / 390.00
	External Pressure	Min / Std / Max	Pa	-	-
			In Wg	-	-
Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52
			Ø, inch	3/8"	3/8"
	Gas Pipe		Ø, mm	15.88	15.88
			Ø, inch	5/8"	5/8"
	Drain Pipe	Ø, mm	ID18 HOSE	ID18 HOSE	
Field Wiring	Power Source Wire		mm <sup>2</sup>	2.5	2.5
	Transmission Cable		mm <sup>2</sup>	0.75 - 1.50	0.75 - 1.50
Refrigerant	Type		-	R410A	R410A
	Control Method		-	EEV INCLUDED	EEV INCLUDED
Sound	Pressure	High / Mid / Low	dB(A)	40 / 36 / 32	
	Power	Cooling		-	-
Dimensions	Net Weight		kg	28.49	31.48
			lbs	62.80	69.40
	Shipping Weight		kg	33.48	36.51
			lbs	73.80	80.50
	Net Dimensions (WxHxD)		mm	1,225 x 600 x 220	1,449 x 600 x 220
			inch	48.23 x 23.62 x 8.66	57.05 x 23.62 x 8.66
	Shipping Dimensions (WxHxD)		mm	1,335 x 690 x 310	1,534 x 690 x 310
			inch	52.56 x 27.17 x 12.20	60.39 x 27.17 x 12.20
Panel Size	Panel Model		-	-	-
	Panel Net Weight		kg	-	-
			lbs	-	-
	Shipping Weight		kg	-	-
			lbs	-	-
	Net Dimensions (WxHxD)		mm	-	-
			inch	-	-
	Shipping Dimensions (WxHxD)		mm	-	-
inch			-	-	
Additional Accessories	Drain pump	Drain pump	-	-	
		Max. lifting Height / Displacement	mm / liter / h	-	-
	Air Filter		-	Long Life Filter	Long Life Filter

- Nominal capacity are based on (Refrigerant Piping : 25ft , Level Differences : 0ft);
- .Cooling : Indoor temperature : 80°F DB, 67°F WB / Outdoor temperature : 95°F DB, 75°F WB
- .Heating : Indoor temperature : 70°F DB, 60°F WB / Outdoor temperature : 47°F DB, 43°F WB
- Sound pressure was acquired in a dead room. Thus actual noise level may be different depending on the installation conditions.
- Specifications are subject to change without prior notice for product improvement.





# Capacity table

## Floor Standing - Cased/Exposed

Cooling

TC : Total Capacity, SHC : Sensible Heat Capacity

Model	Outdoor temperature (°F, DB)	Indoor temperature (°F, WB)													
		57.0		61.0		64.0		67.0		70.0		72.0		75.0	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
VSCC024S4-4P	50.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	27.00	19.20	28.70	18.20
	54.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.70	18.20
	58.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.70	18.20
	60.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	64.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	67.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	70.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	73.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	77.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	80.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	84.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	88.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	92.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	95.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	99.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	24.70	18.50	26.40	18.50	27.70	17.50
	103.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	24.70	18.50	26.00	18.20	27.40	17.20
	107.0	16.60	14.50	19.60	16.90	22.50	17.40	23.70	18.00	24.40	18.30	25.60	17.90	26.70	16.80
	111.0	16.60	14.50	19.60	16.90	21.90	16.90	22.90	17.40	23.70	17.80	24.60	17.20	25.80	16.20
115.0	16.60	14.50	19.40	16.70	21.50	16.70	22.20	16.80	23.00	17.30	23.80	16.60	25.10	15.70	
118.0	16.40	14.30	19.20	16.50	21.20	16.40	21.60	16.40	22.50	16.90	23.10	16.10	24.20	15.20	
120.0	16.10	14.10	18.90	16.30	20.70	16.00	21.40	16.20	21.80	16.40	22.20	15.50	23.30	14.60	
VSEC024S4-4P	50.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	27.00	19.20	28.70	18.20
	54.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.70	18.20
	58.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.70	18.20
	60.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	64.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	67.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	70.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	73.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	77.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	80.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	84.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	88.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	92.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	95.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	25.00	18.90	26.70	18.90	28.40	17.90
	99.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	24.70	18.50	26.40	18.50	27.70	17.50
	103.0	16.60	14.50	19.60	16.90	22.60	17.50	24.00	18.20	24.70	18.50	26.00	18.20	27.40	17.20
	107.0	16.60	14.50	19.60	16.90	22.50	17.40	23.70	18.00	24.40	18.30	25.60	17.90	26.70	16.80
	111.0	16.60	14.50	19.60	16.90	21.90	16.90	22.90	17.40	23.70	17.80	24.60	17.20	25.80	16.20
115.0	16.60	14.50	19.40	16.70	21.50	16.70	22.20	16.80	23.00	17.30	23.80	16.60	25.10	15.70	
118.0	16.40	14.30	19.20	16.50	21.20	16.40	21.60	16.40	22.50	16.90	23.10	16.10	24.20	15.20	
120.0	16.10	14.10	18.90	16.30	20.70	16.00	21.40	16.20	21.80	16.40	22.20	15.50	23.30	14.60	



# Capacity table

## Floor Standing - Cased/Exposed

Heating

TC : Total Capacity

Model	Outdoor temperature (°F)		Indoor temperature (°F, DB)				
			61.0	65.0	70.0	72.0	75.0
	DB	WB	TC	TC	TC	TC	TC
VSCC006S4-4P	-12.6	-13.0	3.59	3.59	3.59	3.59	3.59
	-7.1	-7.6	3.86	3.86	3.86	3.86	3.86
	-3.6	-4.0	4.04	4.04	4.04	4.04	4.04
	-1.8	-2.2	4.13	4.13	4.13	4.13	4.13
	2.0	1.0	4.33	4.29	4.29	4.29	4.29
	6.0	5.0	4.58	4.34	4.34	4.34	4.31
	10.0	9.0	4.77	4.72	4.72	4.72	4.50
	13.0	12.0	5.23	5.23	5.03	5.03	4.96
	17.0	15.0	5.49	5.45	5.23	5.14	5.14
	19.0	18.0	5.76	5.63	5.49	5.23	5.23
	23.0	21.0	6.16	5.90	5.90	5.36	5.36
	26.0	24.0	6.43	6.16	6.16	5.90	5.90
	30.0	28.0	6.70	6.70	6.43	6.16	5.90
	35.0	32.0	6.97	6.70	6.70	6.16	5.90
	39.0	36.0	7.24	6.97	6.70	6.16	5.90
	44.0	40.0	7.50	7.24	6.70	6.16	5.90
	47.0	43.0	7.50	7.24	6.70	6.16	5.90
	51.0	47.0	8.04	7.24	6.70	6.16	5.90
	54.0	50.0	8.04	7.24	6.70	6.16	5.90
	57.0	53.0	8.04	7.24	6.70	6.16	5.90
60.0	56.0	8.04	7.24	6.70	6.16	5.90	
VSEC006S4-4P	-12.6	-13.0	3.59	3.59	3.59	3.59	3.59
	-7.1	-7.6	3.86	3.86	3.86	3.86	3.86
	-3.6	-4.0	4.04	4.04	4.04	4.04	4.04
	-1.8	-2.2	4.13	4.13	4.13	4.13	4.13
	2.0	1.0	4.33	4.29	4.29	4.29	4.29
	6.0	5.0	4.58	4.34	4.34	4.34	4.31
	10.0	9.0	4.77	4.72	4.72	4.72	4.50
	13.0	12.0	5.23	5.23	5.03	5.03	4.96
	17.0	15.0	5.49	5.45	5.23	5.14	5.14
	19.0	18.0	5.76	5.63	5.49	5.23	5.23
	23.0	21.0	6.16	5.90	5.90	5.36	5.36
	26.0	24.0	6.43	6.16	6.16	5.90	5.90
	30.0	28.0	6.70	6.70	6.43	6.16	5.90
	35.0	32.0	6.97	6.70	6.70	6.16	5.90
	39.0	36.0	7.24	6.97	6.70	6.16	5.90
	44.0	40.0	7.50	7.24	6.70	6.16	5.90
	47.0	43.0	7.50	7.24	6.70	6.16	5.90
	51.0	47.0	8.04	7.24	6.70	6.16	5.90
	54.0	50.0	8.04	7.24	6.70	6.16	5.90
	57.0	53.0	8.04	7.24	6.70	6.16	5.90
60.0	56.0	8.04	7.24	6.70	6.16	5.90	
VSCC009S4-4P	-12.6	-13.0	5.71	5.71	5.71	5.71	6.23
	-7.1	-7.6	6.04	6.04	6.04	6.04	6.23
	-3.6	-4.0	6.26	6.26	6.26	6.26	6.23
	-1.8	-2.2	6.37	6.37	6.37	6.37	6.23
	2.0	1.0	6.61	6.61	6.56	6.56	6.23
	6.0	5.0	6.92	6.92	6.63	6.59	6.30
	10.0	9.0	7.15	7.15	7.09	6.82	6.76
	13.0	12.0	7.47	7.47	7.47	7.38	7.14
	17.0	15.0	7.66	7.60	7.60	7.60	7.27
	19.0	18.0	7.87	7.71	7.71	7.71	7.38
	23.0	21.0	8.20	7.87	7.87	7.87	7.55
	26.0	24.0	8.53	8.53	8.20	8.20	7.87
	30.0	28.0	9.19	8.86	8.86	8.53	8.20
	35.0	32.0	9.52	9.19	9.19	8.86	8.53
	39.0	36.0	9.84	9.84	9.52	9.19	8.86
	44.0	40.0	10.50	10.17	10.17	9.52	8.86
	47.0	43.0	10.83	10.50	10.50	9.84	8.86
	51.0	47.0	11.16	10.83	10.50	9.84	8.86
	54.0	50.0	11.48	10.83	10.50	9.84	8.86
	57.0	53.0	11.81	11.16	10.50	9.84	8.86
60.0	56.0	12.14	11.16	10.50	9.84	8.86	
VSEC009S4-4P	-12.6	-13.0	5.71	5.71	5.71	5.71	6.23
	-7.1	-7.6	6.04	6.04	6.04	6.04	6.23
	-3.6	-4.0	6.26	6.26	6.26	6.26	6.23
	-1.8	-2.2	6.37	6.37	6.37	6.37	6.23
	2.0	1.0	6.61	6.61	6.56	6.56	6.23
	6.0	5.0	6.92	6.92	6.63	6.59	6.30
	10.0	9.0	7.15	7.15	7.09	6.82	6.76
	13.0	12.0	7.47	7.47	7.47	7.38	7.14
	17.0	15.0	7.66	7.60	7.60	7.60	7.27
	19.0	18.0	7.87	7.71	7.71	7.71	7.38
	23.0	21.0	8.20	7.87	7.87	7.87	7.55
	26.0	24.0	8.53	8.53	8.20	8.20	7.87
	30.0	28.0	9.19	8.86	8.86	8.53	8.20
	35.0	32.0	9.52	9.19	9.19	8.86	8.53
	39.0	36.0	9.84	9.84	9.52	9.19	8.86
	44.0	40.0	10.50	10.17	10.17	9.52	8.86
	47.0	43.0	10.83	10.50	10.50	9.84	8.86
	51.0	47.0	11.16	10.83	10.50	9.84	8.86
	54.0	50.0	11.48	10.83	10.50	9.84	8.86
	57.0	53.0	11.81	11.16	10.50	9.84	8.86
60.0	56.0	12.14	11.16	10.50	9.84	8.86	

# Capacity table

## Floor Standing - Cased/Exposed

Heating

TC : Total Capacity

Model	Outdoor temperature (°F)		Indoor temperature (°F, DB)				
			61.0	65.0	70.0	72.0	75.0
	DB	WB	TC	TC	TC	TC	TC
VSCC012S4-4P	-12.6	-13.0	7.02	7.56	7.22	7.22	7.76
	-7.1	-7.6	7.70	7.90	7.56	7.56	7.76
	-3.6	-4.0	8.15	8.12	7.79	7.79	7.76
	-1.8	-2.2	8.37	8.23	7.90	7.90	7.76
	2.0	1.0	8.83	8.49	8.15	8.15	7.81
	6.0	5.0	9.15	8.81	8.51	8.47	8.17
	10.0	9.0	9.38	9.04	8.98	8.71	8.64
	13.0	12.0	9.70	9.62	9.62	9.28	9.28
	17.0	15.0	9.90	9.90	9.84	9.56	9.51
	19.0	18.0	10.12	10.12	9.96	9.79	9.62
	23.0	21.0	10.46	10.46	10.12	10.12	9.79
	26.0	24.0	11.14	10.80	10.80	10.46	10.12
	30.0	28.0	11.48	11.48	11.14	10.80	10.46
	35.0	32.0	12.15	12.15	11.81	11.48	10.80
	39.0	36.0	12.82	12.49	12.49	11.81	11.48
	44.0	40.0	13.16	13.16	12.82	12.15	11.48
	47.0	43.0	13.84	13.84	13.50	12.49	11.48
	51.0	47.0	14.18	13.84	13.50	12.49	11.48
	54.0	50.0	14.85	14.18	13.50	12.49	11.48
	57.0	53.0	15.19	14.18	13.50	12.49	11.48
60.0	56.0	15.52	14.51	13.50	12.49	11.48	
VSEC012S4-4P	-12.6	-13.0	7.02	7.56	7.22	7.22	7.76
	-7.1	-7.6	7.70	7.90	7.56	7.56	7.76
	-3.6	-4.0	8.15	8.12	7.79	7.79	7.76
	-1.8	-2.2	8.37	8.23	7.90	7.90	7.76
	2.0	1.0	8.83	8.49	8.15	8.15	7.81
	6.0	5.0	9.15	8.81	8.51	8.47	8.17
	10.0	9.0	9.38	9.04	8.98	8.71	8.64
	13.0	12.0	9.70	9.62	9.62	9.28	9.28
	17.0	15.0	9.90	9.90	9.84	9.56	9.51
	19.0	18.0	10.12	10.12	9.96	9.79	9.62
	23.0	21.0	10.46	10.46	10.12	10.12	9.79
	26.0	24.0	11.14	10.80	10.80	10.46	10.12
	30.0	28.0	11.48	11.48	11.14	10.80	10.46
	35.0	32.0	12.15	12.15	11.81	11.48	10.80
	39.0	36.0	12.82	12.49	12.49	11.81	11.48
	44.0	40.0	13.16	13.16	12.82	12.15	11.48
	47.0	43.0	13.84	13.84	13.50	12.49	11.48
	51.0	47.0	14.18	13.84	13.50	12.49	11.48
	54.0	50.0	14.85	14.18	13.50	12.49	11.48
	57.0	53.0	15.19	14.18	13.50	12.49	11.48
60.0	56.0	15.52	14.51	13.50	12.49	11.48	
VSCC018S4-4P	-12.6	-13.0	11.87	11.05	11.56	11.24	11.24
	-7.1	-7.6	12.19	11.68	11.87	11.56	11.56
	-3.6	-4.0	12.40	12.11	12.09	11.77	11.77
	-1.8	-2.2	12.51	12.32	12.19	11.87	11.87
	2.0	1.0	12.79	12.75	12.43	12.11	12.06
	6.0	5.0	13.40	13.08	12.76	12.48	12.16
	10.0	9.0	13.84	13.52	13.21	13.14	12.82
	13.0	12.0	14.44	14.37	14.05	13.81	13.73
	17.0	15.0	14.76	14.71	14.44	14.13	14.02
	19.0	18.0	15.08	14.92	14.76	14.44	14.13
	23.0	21.0	15.56	15.24	15.24	14.92	14.29
	26.0	24.0	16.51	16.19	15.87	15.56	14.92
	30.0	28.0	17.14	16.82	16.82	16.19	15.56
	35.0	32.0	18.09	17.78	17.46	16.82	15.87
	39.0	36.0	18.73	18.73	18.41	17.78	16.82
	44.0	40.0	19.68	19.36	19.05	18.09	16.82
	47.0	43.0	20.63	20.32	20.00	18.41	16.82
	51.0	47.0	21.27	20.63	20.00	18.41	16.82
	54.0	50.0	21.90	20.95	20.00	18.41	16.82
	57.0	53.0	22.54	21.27	20.00	18.41	16.82
60.0	56.0	23.17	21.59	20.00	18.41	16.82	
VSEC018S4-4P	-12.6	-13.0	11.87	11.05	11.56	11.24	11.24
	-7.1	-7.6	12.19	11.68	11.87	11.56	11.56
	-3.6	-4.0	12.40	12.11	12.09	11.77	11.77
	-1.8	-2.2	12.51	12.32	12.19	11.87	11.87
	2.0	1.0	12.79	12.75	12.43	12.11	12.06
	6.0	5.0	13.40	13.08	12.76	12.48	12.16
	10.0	9.0	13.84	13.52	13.21	13.14	12.82
	13.0	12.0	14.44	14.37	14.05	13.81	13.73
	17.0	15.0	14.76	14.71	14.44	14.13	14.02
	19.0	18.0	15.08	14.92	14.76	14.44	14.13
	23.0	21.0	15.56	15.24	15.24	14.92	14.29
	26.0	24.0	16.51	16.19	15.87	15.56	14.92
	30.0	28.0	17.14	16.82	16.82	16.19	15.56
	35.0	32.0	18.09	17.78	17.46	16.82	15.87
	39.0	36.0	18.73	18.73	18.41	17.78	16.82
	44.0	40.0	19.68	19.36	19.05	18.09	16.82
	47.0	43.0	20.63	20.32	20.00	18.41	16.82
	51.0	47.0	21.27	20.63	20.00	18.41	16.82
	54.0	50.0	21.90	20.95	20.00	18.41	16.82
	57.0	53.0	22.54	21.27	20.00	18.41	16.82
60.0	56.0	23.17	21.59	20.00	18.41	16.82	

# Capacity table

## Floor Standing - Cased/Exposed

Heating

TC : Total Capacity


Model	Outdoor temperature (°F)		Indoor temperature (°F, DB)				
			61.0	65.0	70.0	72.0	75.0
	DB	WB	TC	TC	TC	TC	TC
VSCC024S4-4P	-12.6	-13.0	15.46	16.00	15.66	15.32	15.32
	-7.1	-7.6	16.13	16.33	16.00	15.66	15.66
	-3.6	-4.0	16.58	16.56	16.22	15.88	15.88
	-1.8	-2.2	16.81	16.67	16.33	16.00	16.00
	2.0	1.0	17.31	16.98	16.64	16.25	16.20
	6.0	5.0	17.99	17.65	17.31	16.67	16.33
	10.0	9.0	18.70	18.36	18.02	17.62	17.28
	13.0	12.0	19.66	19.32	18.98	18.65	18.56
	17.0	15.0	20.08	19.74	19.41	19.07	19.01
	19.0	18.0	20.42	20.08	19.74	19.41	19.24
	23.0	21.0	20.92	20.59	20.25	19.91	19.58
	26.0	24.0	21.94	21.94	21.60	20.92	20.25
	30.0	28.0	23.29	22.95	22.61	21.60	20.92
	35.0	32.0	24.30	23.96	23.62	22.61	21.60
	39.0	36.0	25.65	25.31	24.64	23.96	22.95
	44.0	40.0	26.66	26.33	25.99	24.30	22.95
	47.0	43.0	27.67	27.34	27.00	24.98	22.95
	51.0	47.0	28.69	27.67	27.00	24.98	22.95
	54.0	50.0	29.36	28.35	27.00	24.98	22.95
	57.0	53.0	30.37	28.69	27.00	24.98	22.95
60.0	56.0	31.05	29.03	27.00	24.98	22.95	
VSEC024S4-4P	-12.6	-13.0	15.46	16.00	15.66	15.32	15.32
	-7.1	-7.6	16.13	16.33	16.00	15.66	15.66
	-3.6	-4.0	16.58	16.56	16.22	15.88	15.88
	-1.8	-2.2	16.81	16.67	16.33	16.00	16.00
	2.0	1.0	17.31	16.98	16.64	16.25	16.20
	6.0	5.0	17.99	17.65	17.31	16.67	16.33
	10.0	9.0	18.70	18.36	18.02	17.62	17.28
	13.0	12.0	19.66	19.32	18.98	18.65	18.56
	17.0	15.0	20.08	19.74	19.41	19.07	19.01
	19.0	18.0	20.42	20.08	19.74	19.41	19.24
	23.0	21.0	20.92	20.59	20.25	19.91	19.58
	26.0	24.0	21.94	21.94	21.60	20.92	20.25
	30.0	28.0	23.29	22.95	22.61	21.60	20.92
	35.0	32.0	24.30	23.96	23.62	22.61	21.60
	39.0	36.0	25.65	25.31	24.64	23.96	22.95
	44.0	40.0	26.66	26.33	25.99	24.30	22.95
	47.0	43.0	27.67	27.34	27.00	24.98	22.95
	51.0	47.0	28.69	27.67	27.00	24.98	22.95
	54.0	50.0	29.36	28.35	27.00	24.98	22.95
	57.0	53.0	30.37	28.69	27.00	24.98	22.95
60.0	56.0	31.05	29.03	27.00	24.98	22.95	

# Dimensional drawing

## Floor Standing - Exposed


VSEC006S4-4P, VSEC009S4-4P, VSEC012S4-4P

Units : mm / inches

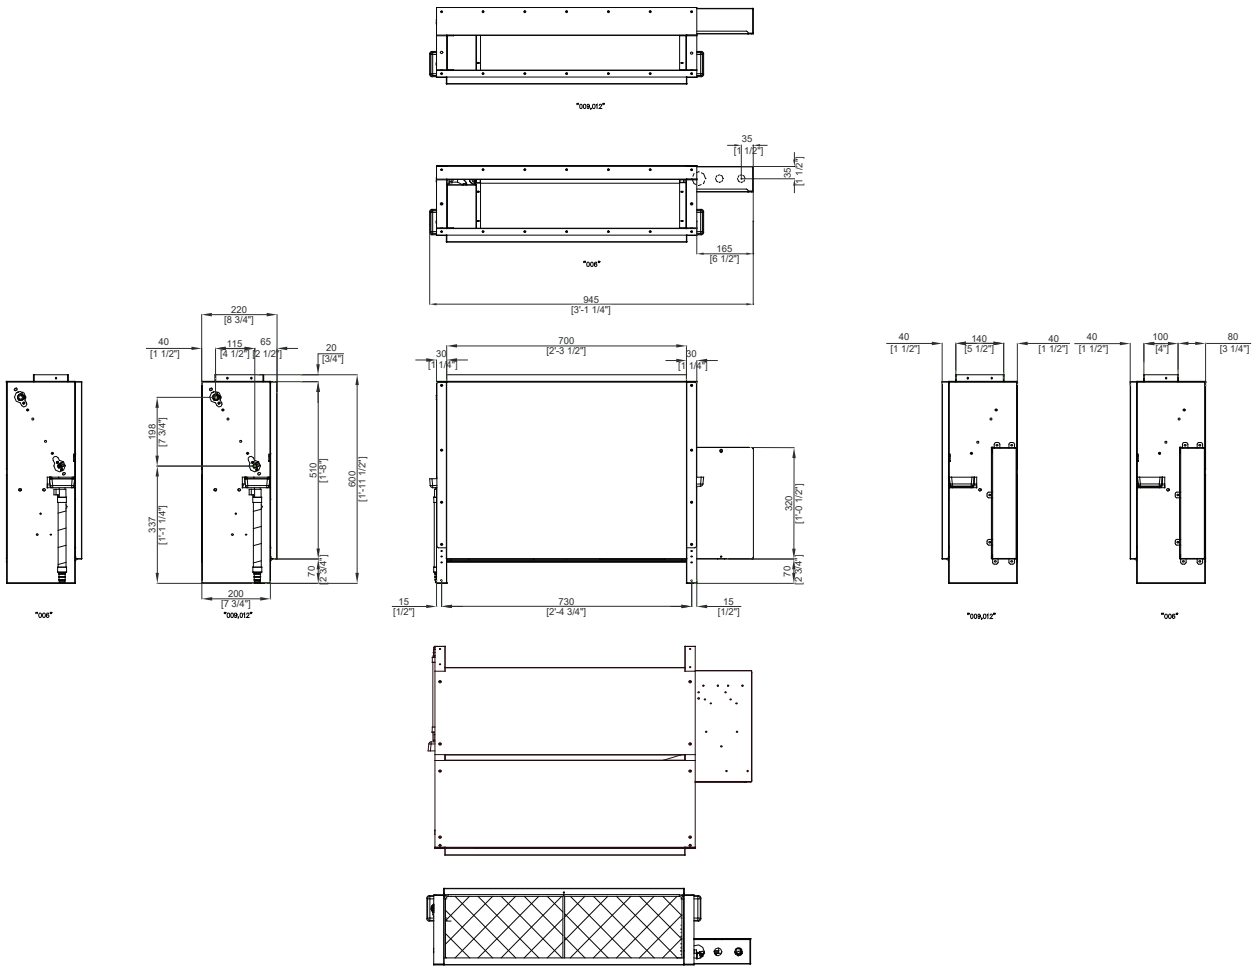

\* Installation Guide

Unit: inch (mm)

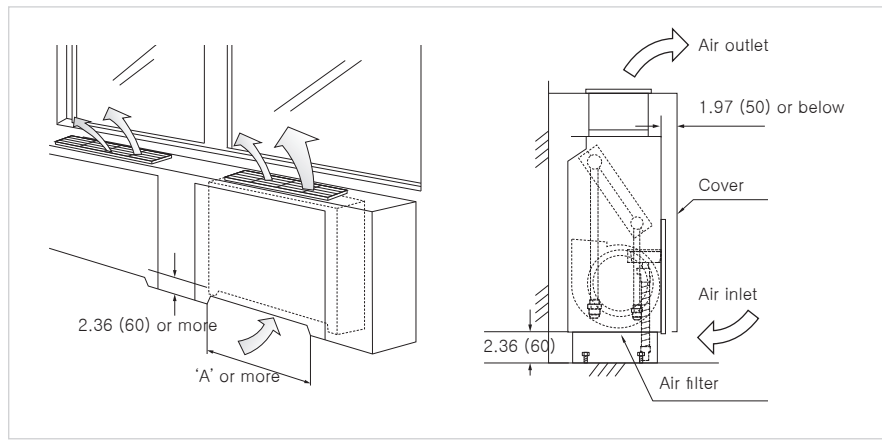


# Dimensional drawing

## Floor Standing - Cased


VSCC006S4-4P, VSCC009S4-4P, VSCC012S4-4P

Units : mm / inches

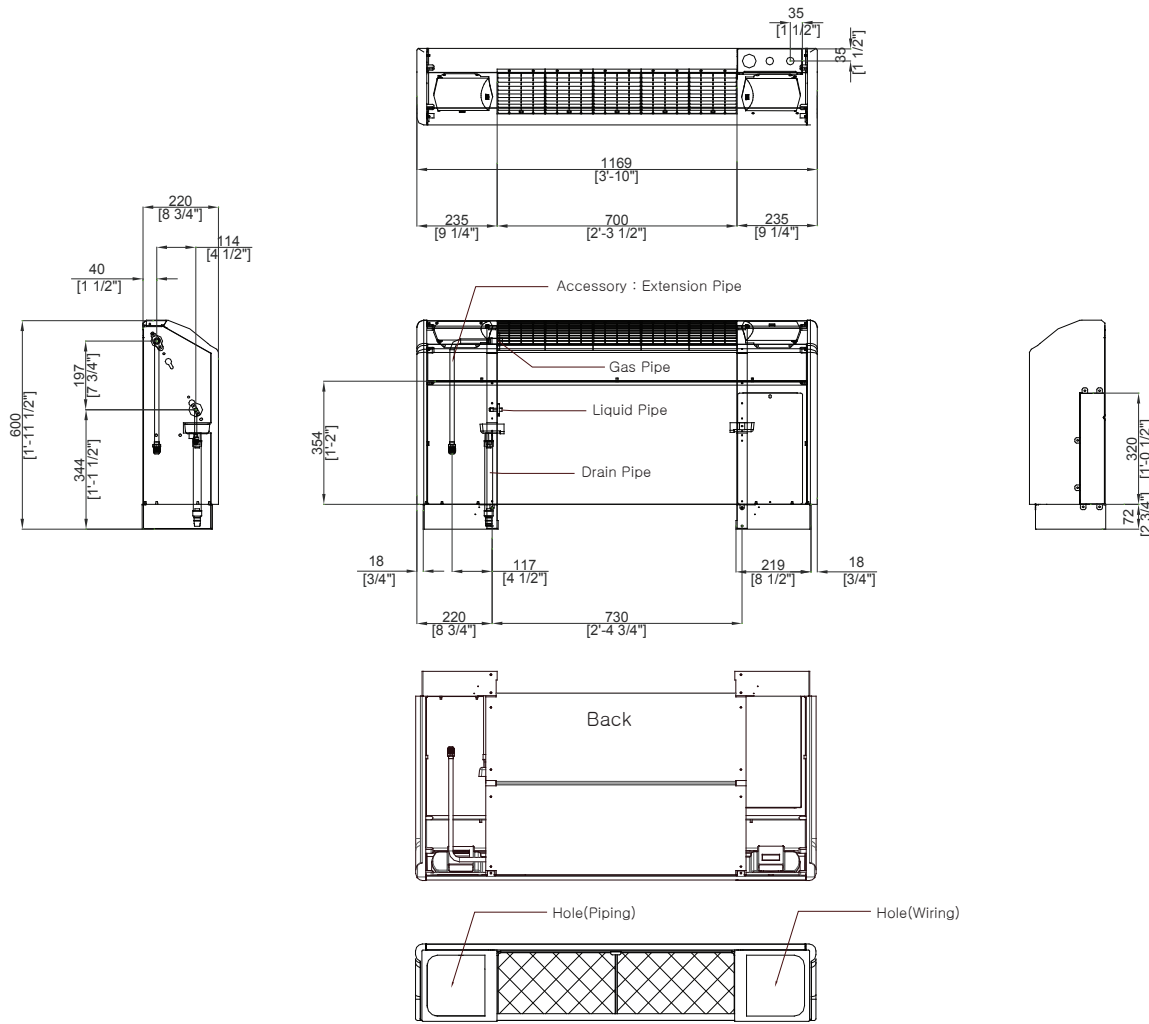

\* Installation Guide

Unit: inch (mm)

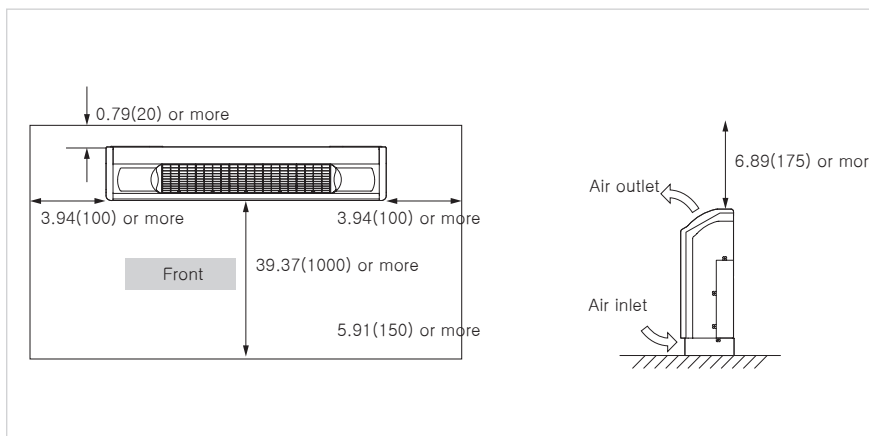


# Dimensional drawing

## Floor Standing - Exposed


VSEC018S4-4P, VSEC024S4-4P

Units : mm / inches

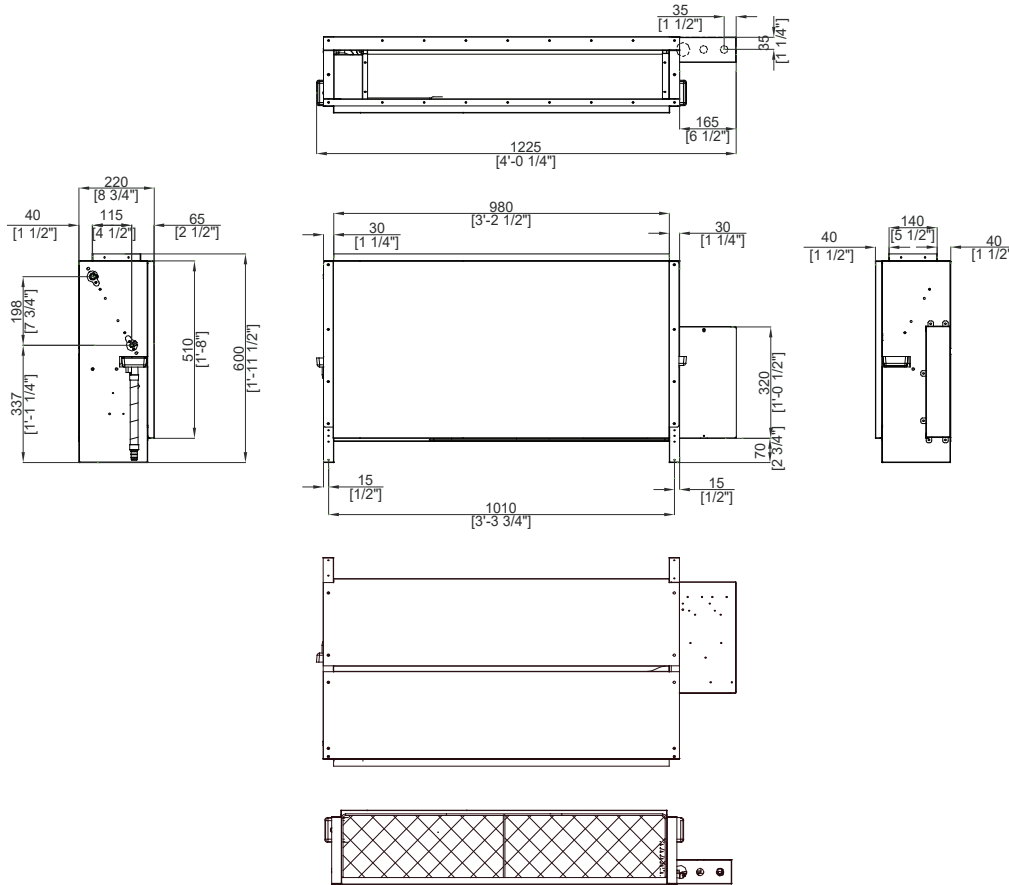

\* Installation Guide

Unit: inch (mm)

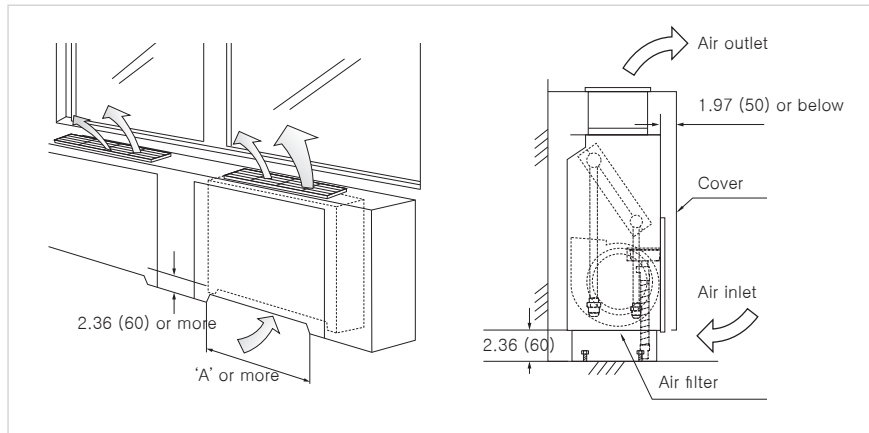


# Dimensional drawing

## Floor Standing - Cased


VSCC018S4-4P, VSCC024S4-4P

Units : mm / inches

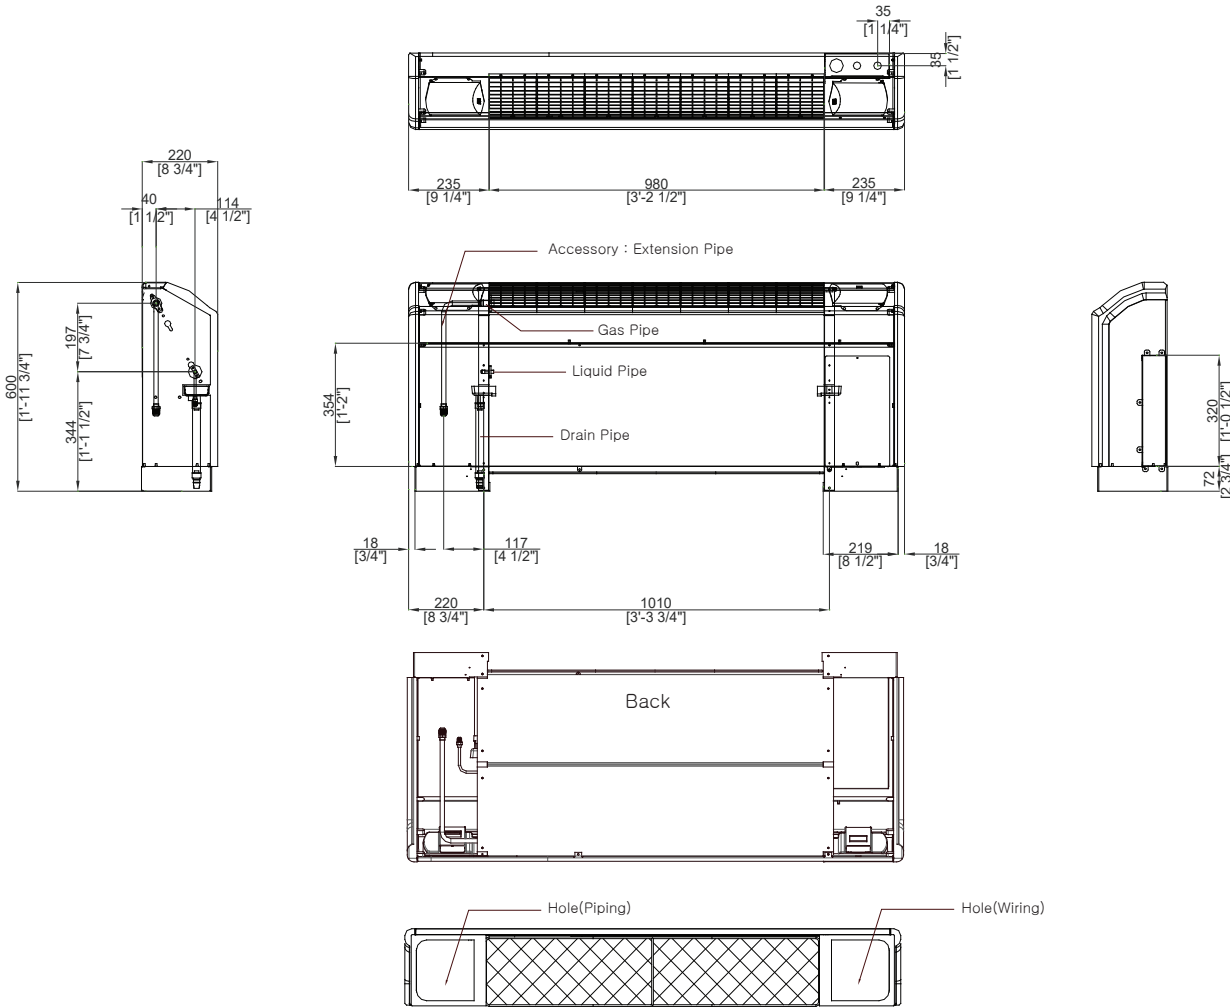

\* Installation Guide

Unit: inch (mm)

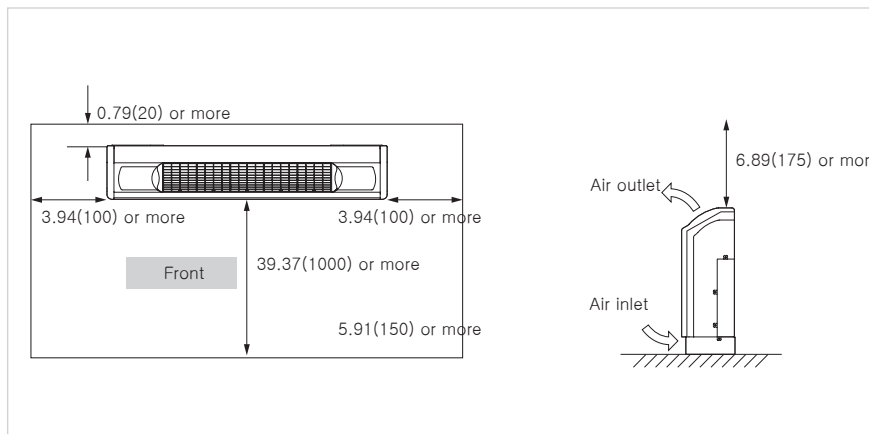


# Electrical wiring diagram

## Floor standing - Cased/Exposed

VSCC006S4-4P, VSEC006S4-4P, VSCC009S4-4P, VSEC009S4-4P, VSCC012S4-4P, VSEC012S4-4P,


VSCC018S4-4P, VSEC018S4-4P, VSCC024S4-4P, VSEC024S4-4P

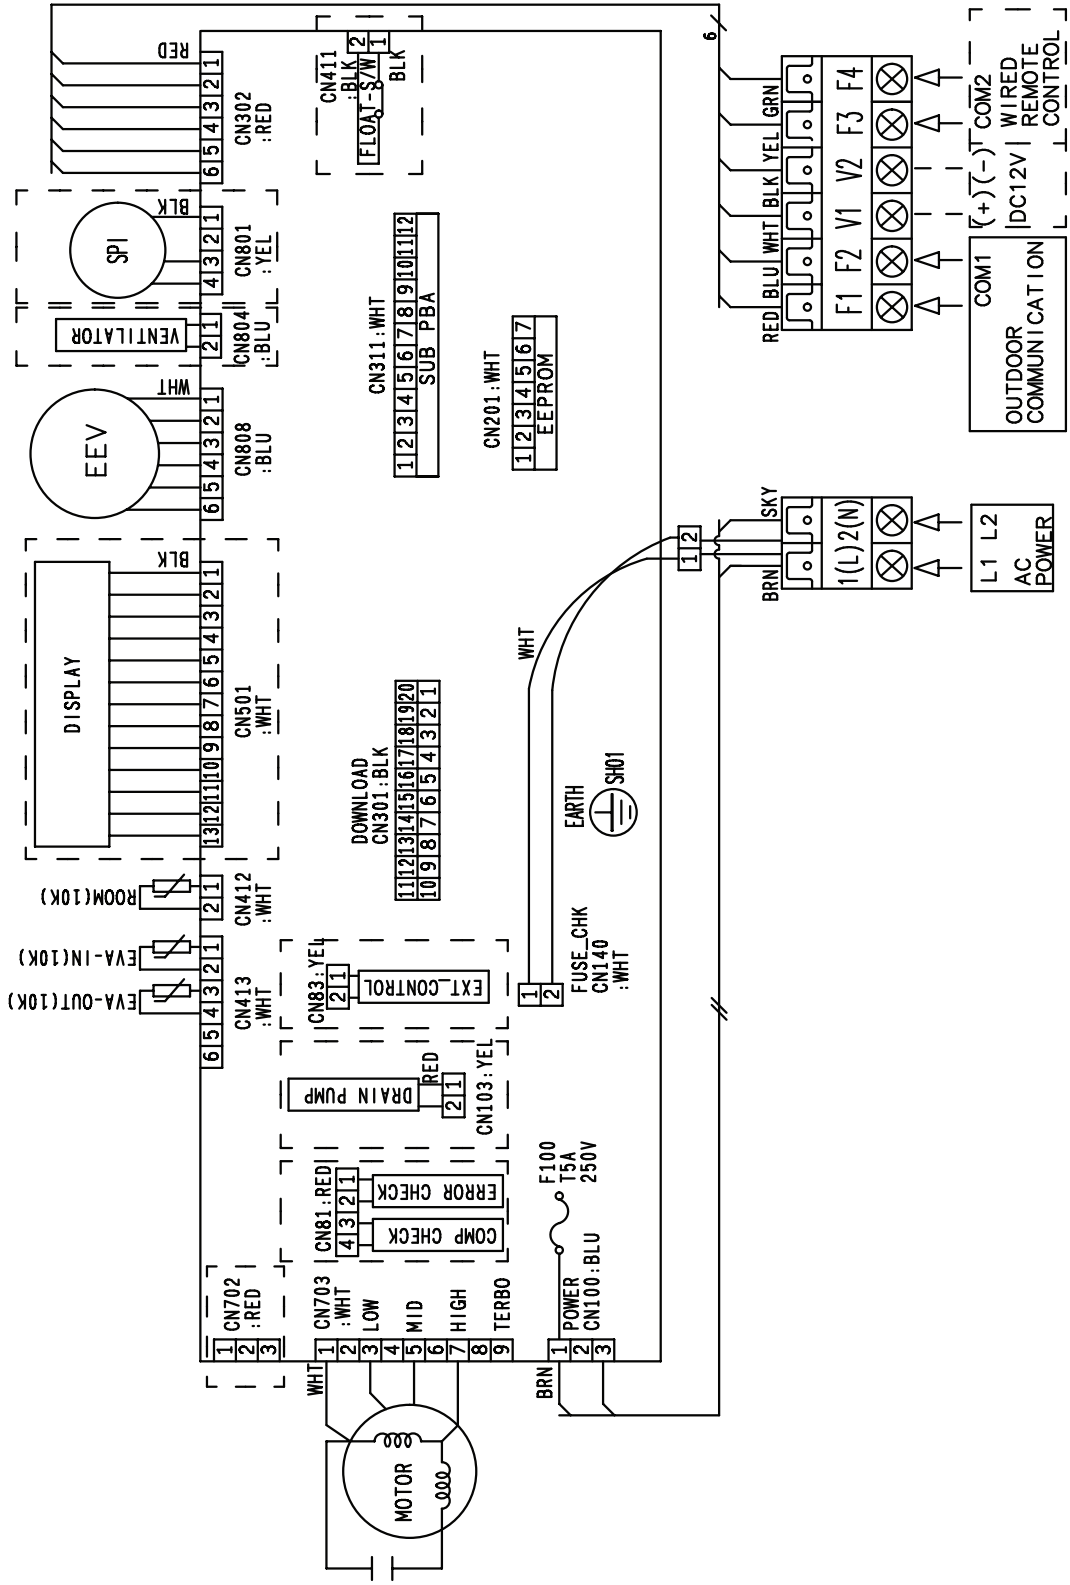



# Sound pressure level

## Floor standing - Cased/Exposed

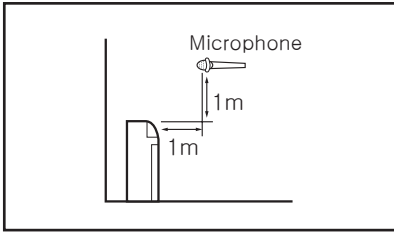

Unit: dB(A)


Model	High	Low
VSCC006S4-4P	23	20
VSEC006S4-4P	23	20
VSCC009S4-4P	26	21
VSEC009S4-4P	26	21

### Note


- These operation values were obtained in an anechoic room. - Sound pressure level will vary depending on a factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

## NC curve


1) VSCC006S4-4P

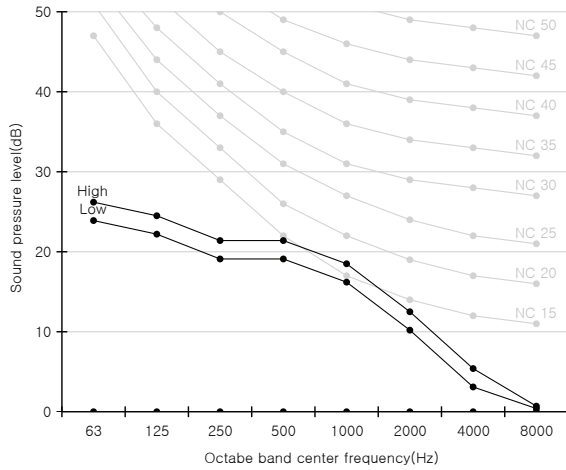


2) VSEC006S4-4P

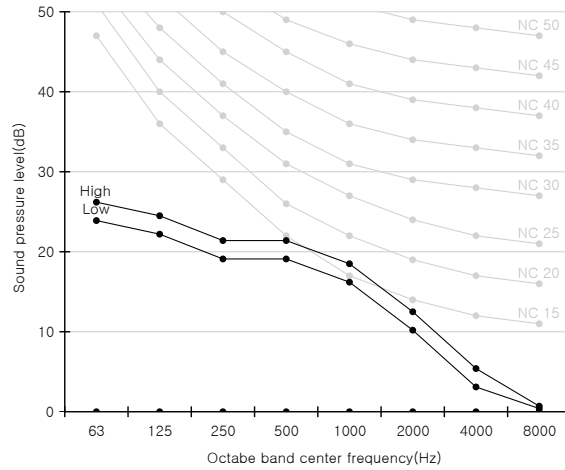

3) VSCC009S4-4P

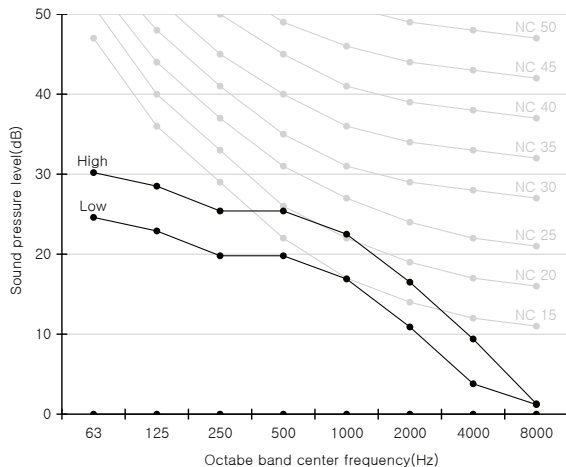


4) VSEC009S4-4P

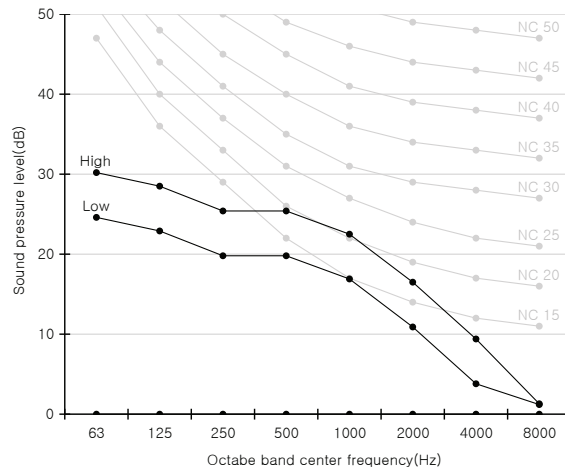

# Sound pressure level

Floor standing - Cased/Exposed

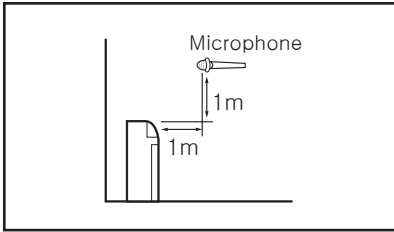

Unit: dB(A)


Model	High	Low
VSCC012S4-4P	37	27
VSEC012S4-4P	37	27
VSCC018S4-4P	40	32
VSEC018S4-4P	40	32

## Note


- These operation values were obtained in an anechoic room. - Sound pressure level will vary depending on a factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

## NC curve


1) VSCC012S4-4P

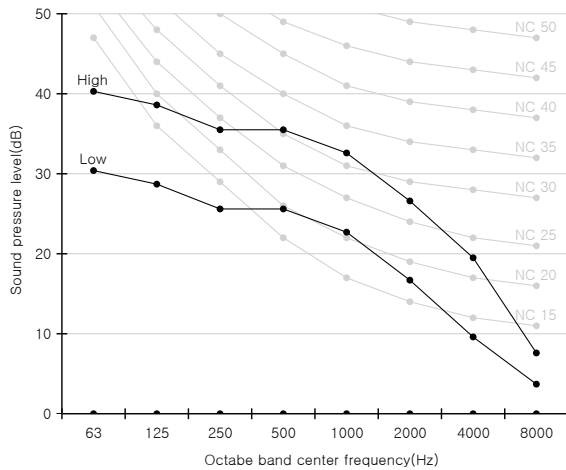


2) VSEC012S4-4P

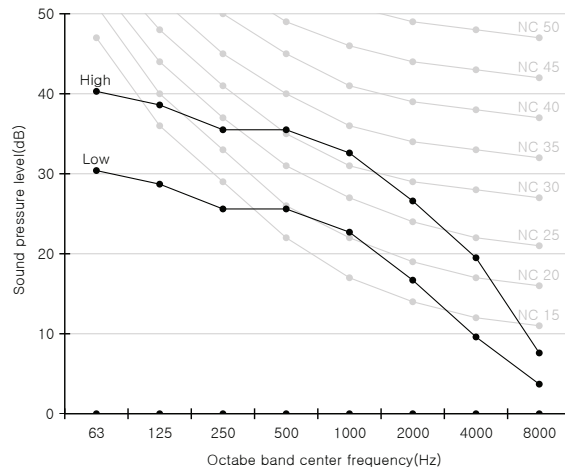

3) VSCC018S4-4P

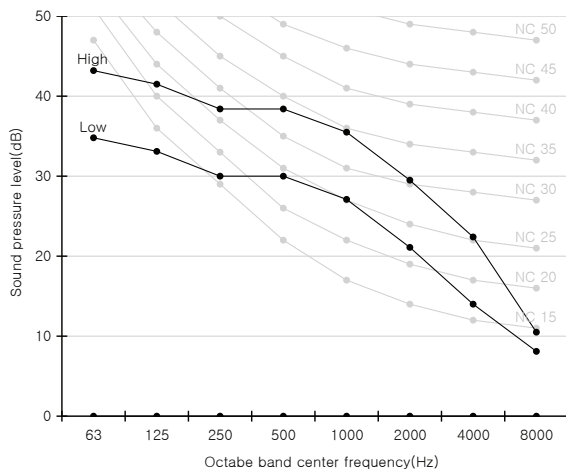


4) VSEC018S4-4P

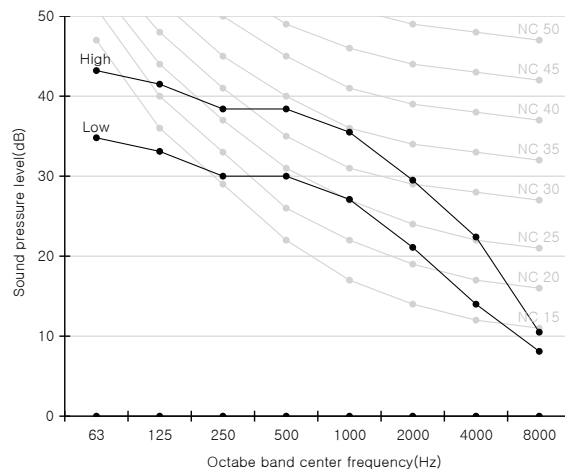

# Sound pressure level

## Floor standing - Cased/Exposed

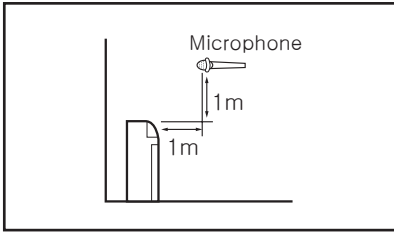

Unit: dB(A)


Model	High	Low
VSCC024S4-4P	40	32
VSEC024S4-4P	40	32

### Note


- These operation values were obtained in an anechoic room. - Sound pressure level will vary depending on a factors such as the construction of the particular room where the equipment is installed.
- Operation sound level may differ depending on operation and ambient conditions.

## NC curve

### 1) VSCC024S4-4P

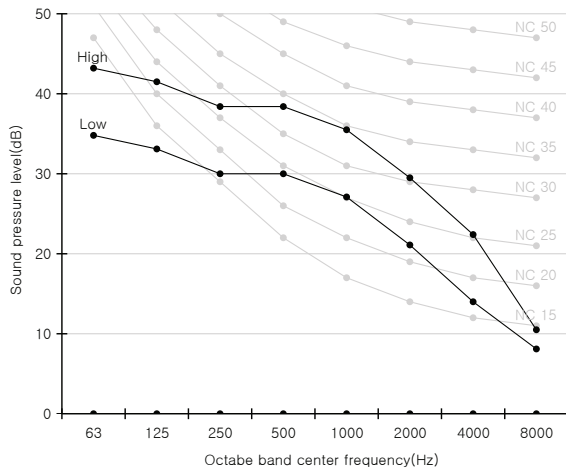

### 2) VSEC024S4-4P

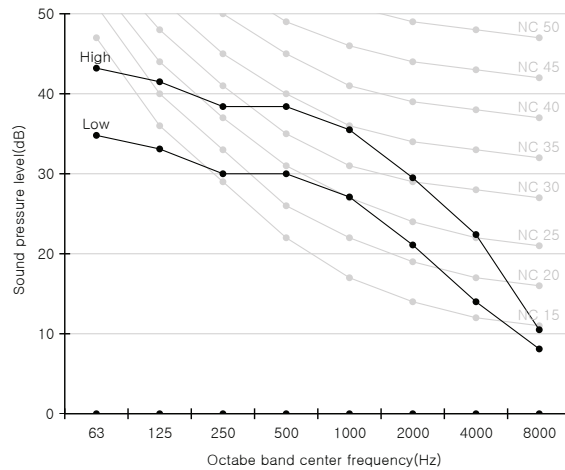


# Temperature and air flow distribution


Floor standing - Cased

VSCC006S4-4P


Cooling air velocity distribution

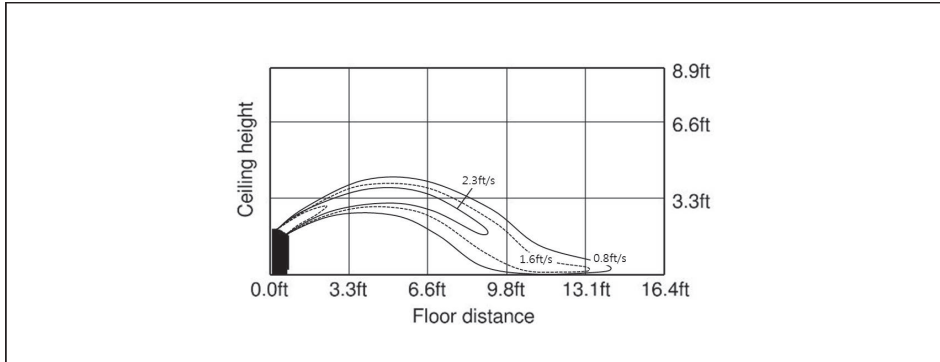


(2) Cooling temperature distribution

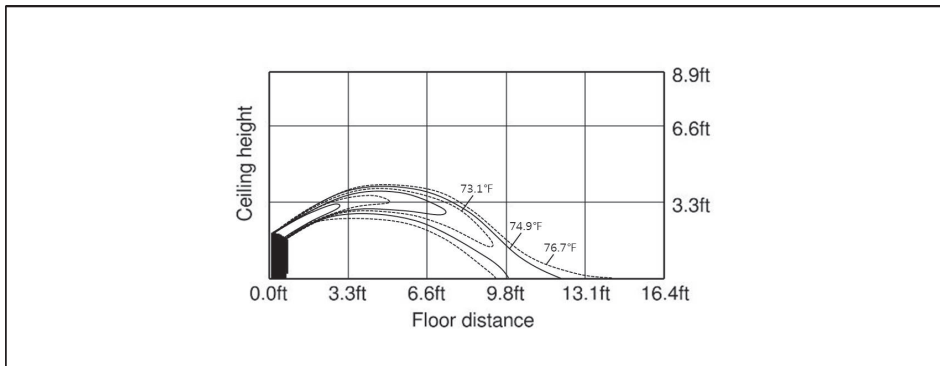

(3) Heating air velocity distribution

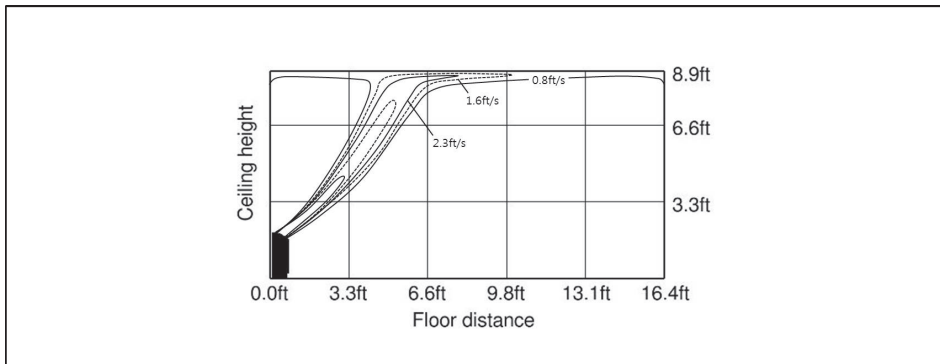

(4) Heating temperature distribution

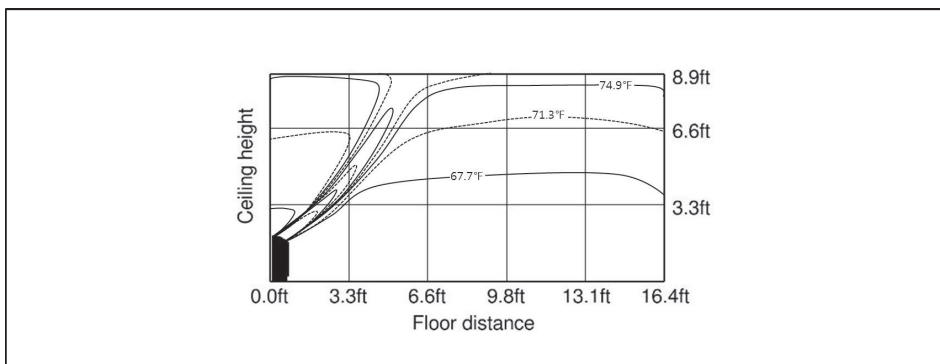


# Temperature and air flow distribution


## Floor standing - Cased

VSCC009S4-4P


Cooling air velocity distribution

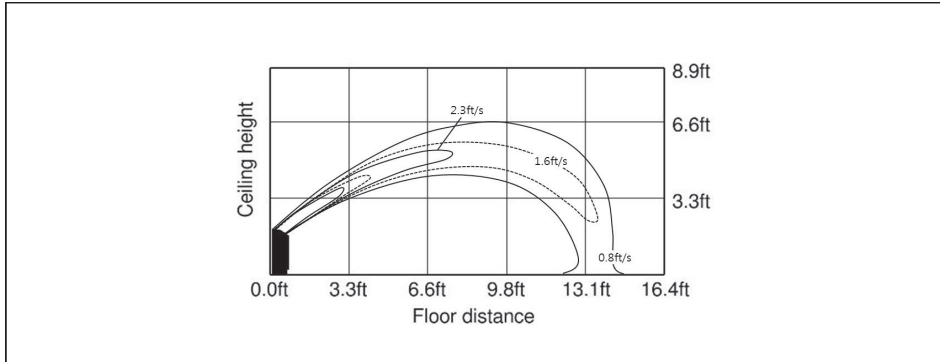


### (2) Cooling temperature distribution

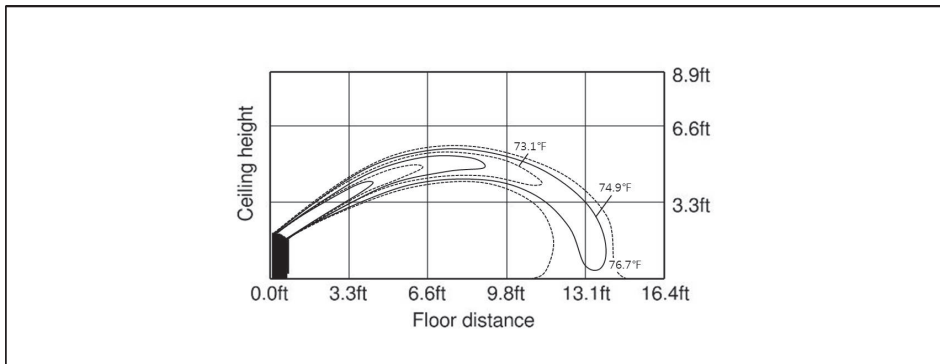

### (3) Heating air velocity distribution

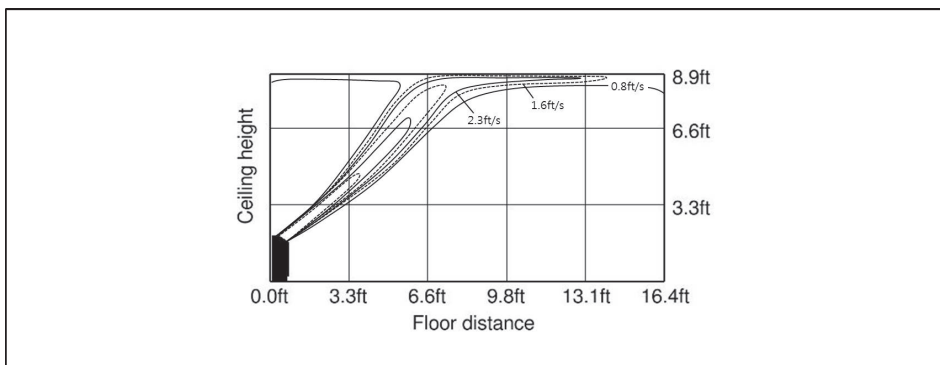

### (4) Heating temperature distribution

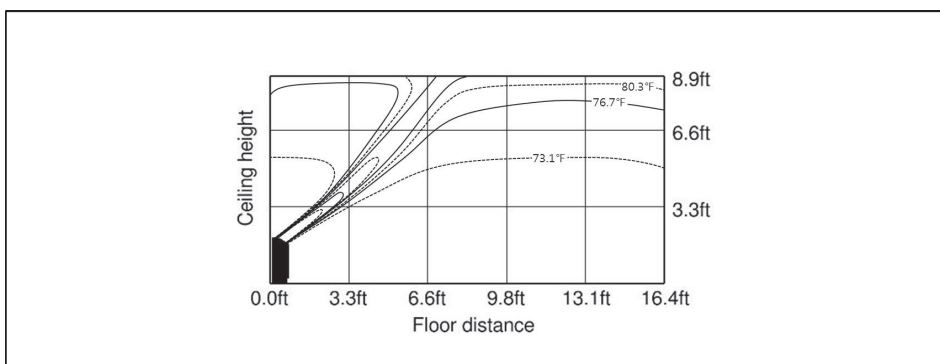


# Temperature and air flow distribution


Floor standing - Cased

VSCC012S4-4P


Cooling air velocity distribution

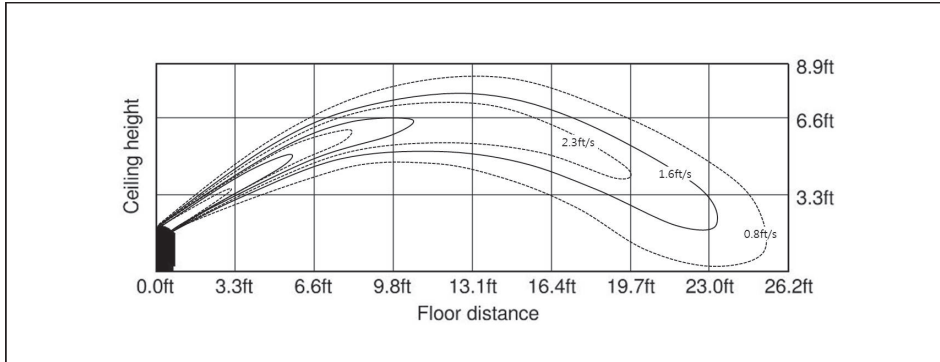


(2) Cooling temperature distribution

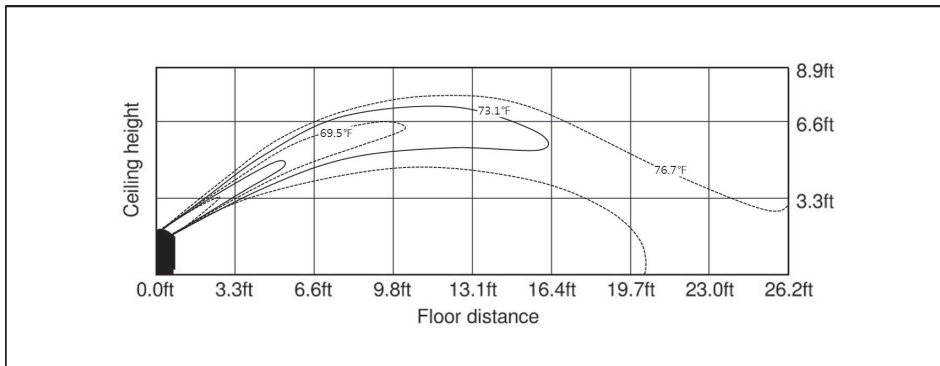

(3) Heating air velocity distribution

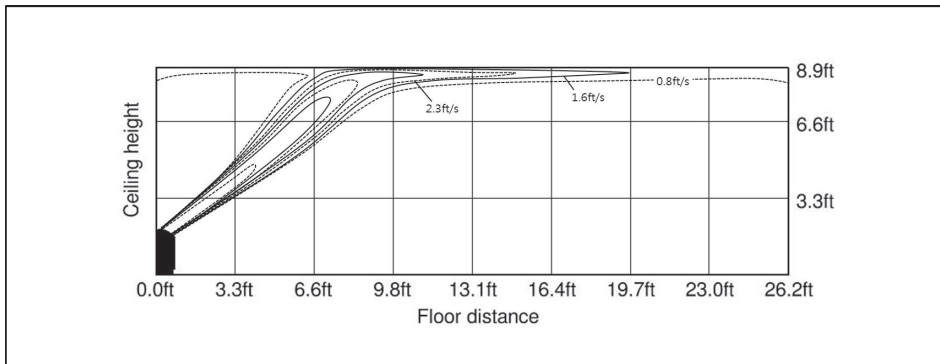

(4) Heating temperature distribution

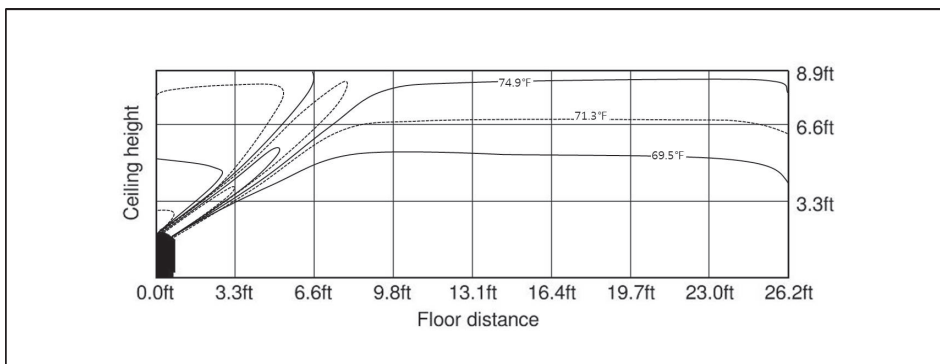


# Temperature and air flow distribution


Floor standing - Cased

VSCC018S4-4P


Cooling air velocity distribution

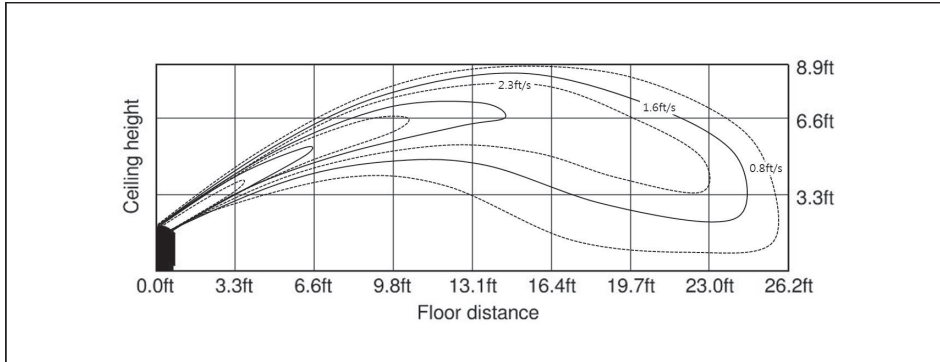


(2) Cooling temperature distribution

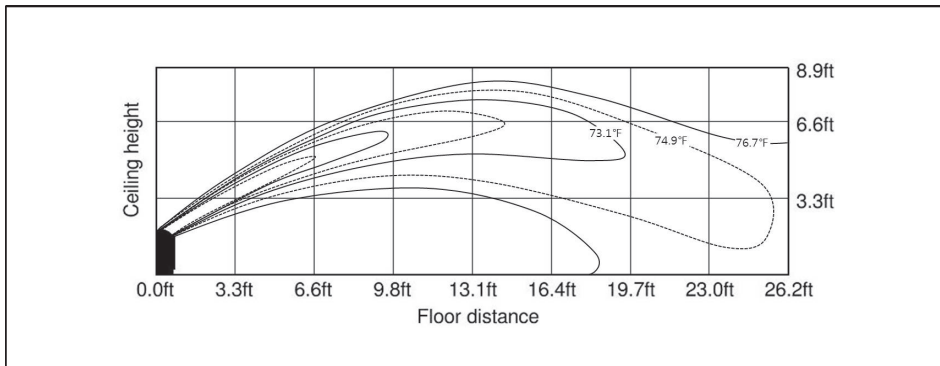

(3) Heating air velocity distribution

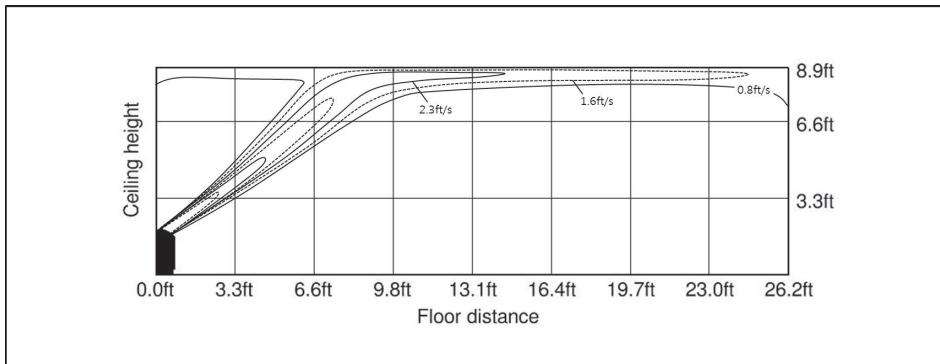

(4) Heating temperature distribution

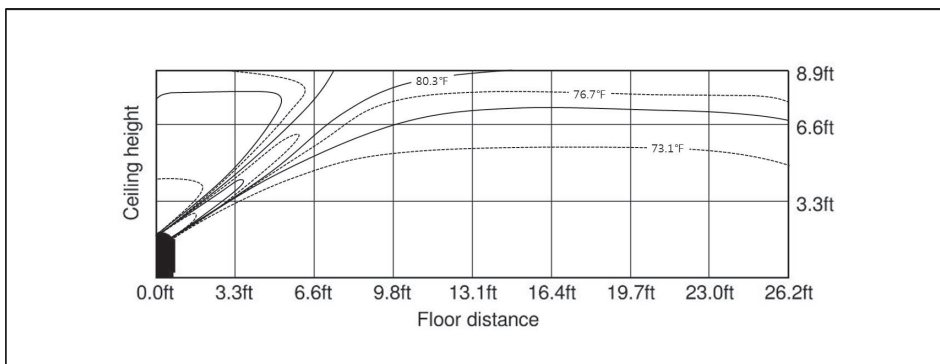


# Temperature and air flow distribution


Floor standing - Cased

VSCC024S4-4P


Cooling air velocity distribution

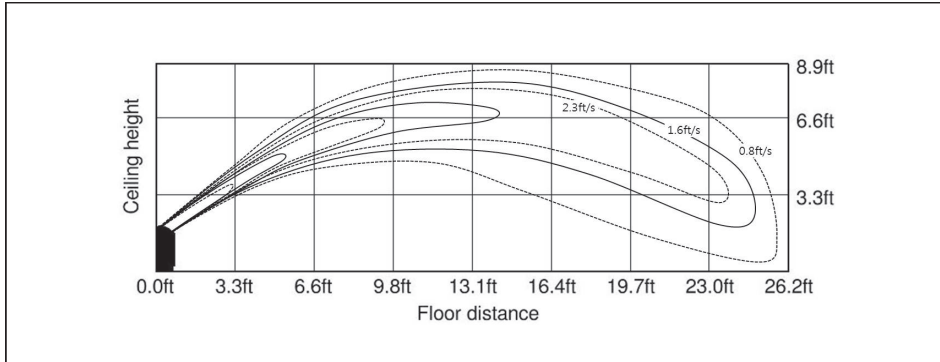


(2) Cooling temperature distribution

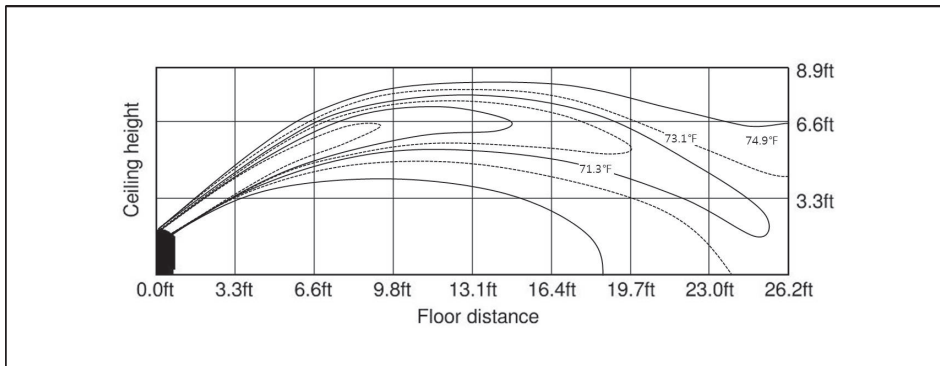

(3) Heating air velocity distribution

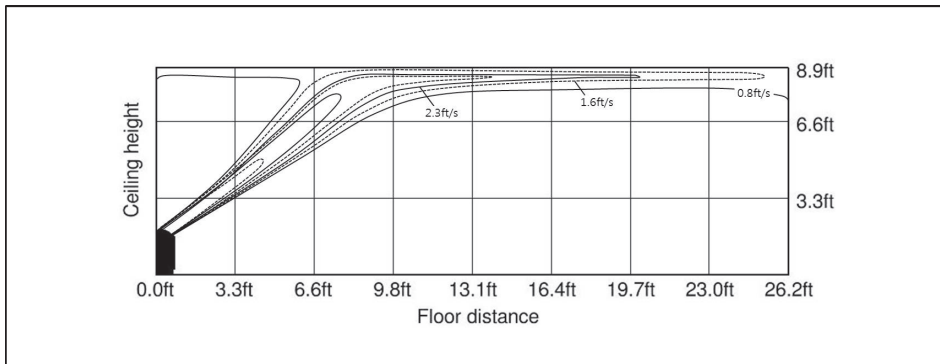

(4) Heating temperature distribution

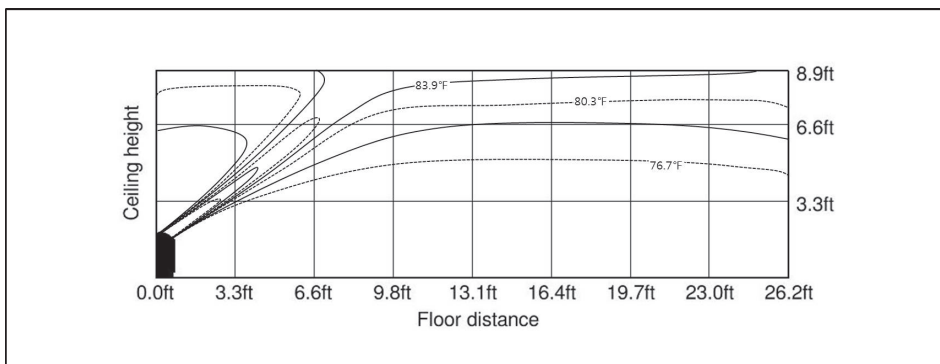





**Intertek**



Visit us at [www.lennox.com](http://www.lennox.com)

For the latest technical information, [www.lennoxcommercial.com](http://www.lennoxcommercial.com)

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2024 Lennox Industries, Inc.